

600X600MM

Available Thickness

 16MM

FULL BODY VITRIFIED TILES



2022
COLLECTION

**EXPE
RIENCE**
THE CHARMING
BEAUTY

Available Thickness

 16MM



600X
600MM

PRESENTING THE **FULL BODY**


SURFACE
RUSTIC

WE ARE SETTING A TREND IN THE CERAMICS SECTOR, BY PRODUCING **HIGH-QUALITY TILES**

We are showcasing the best quality of rustic finish, satin finish and polished finish with the different fabulous colors shades that's make your décor mesmerizing.

Choose our satin finish tiles to give your home a completely flawless appearance if you want to add an unexpected element to any space.

Our Rustic tiles are ornamental glaze tiles that are used to give any room a rustic feel and an attractive appearance without compromising the shiny feature.

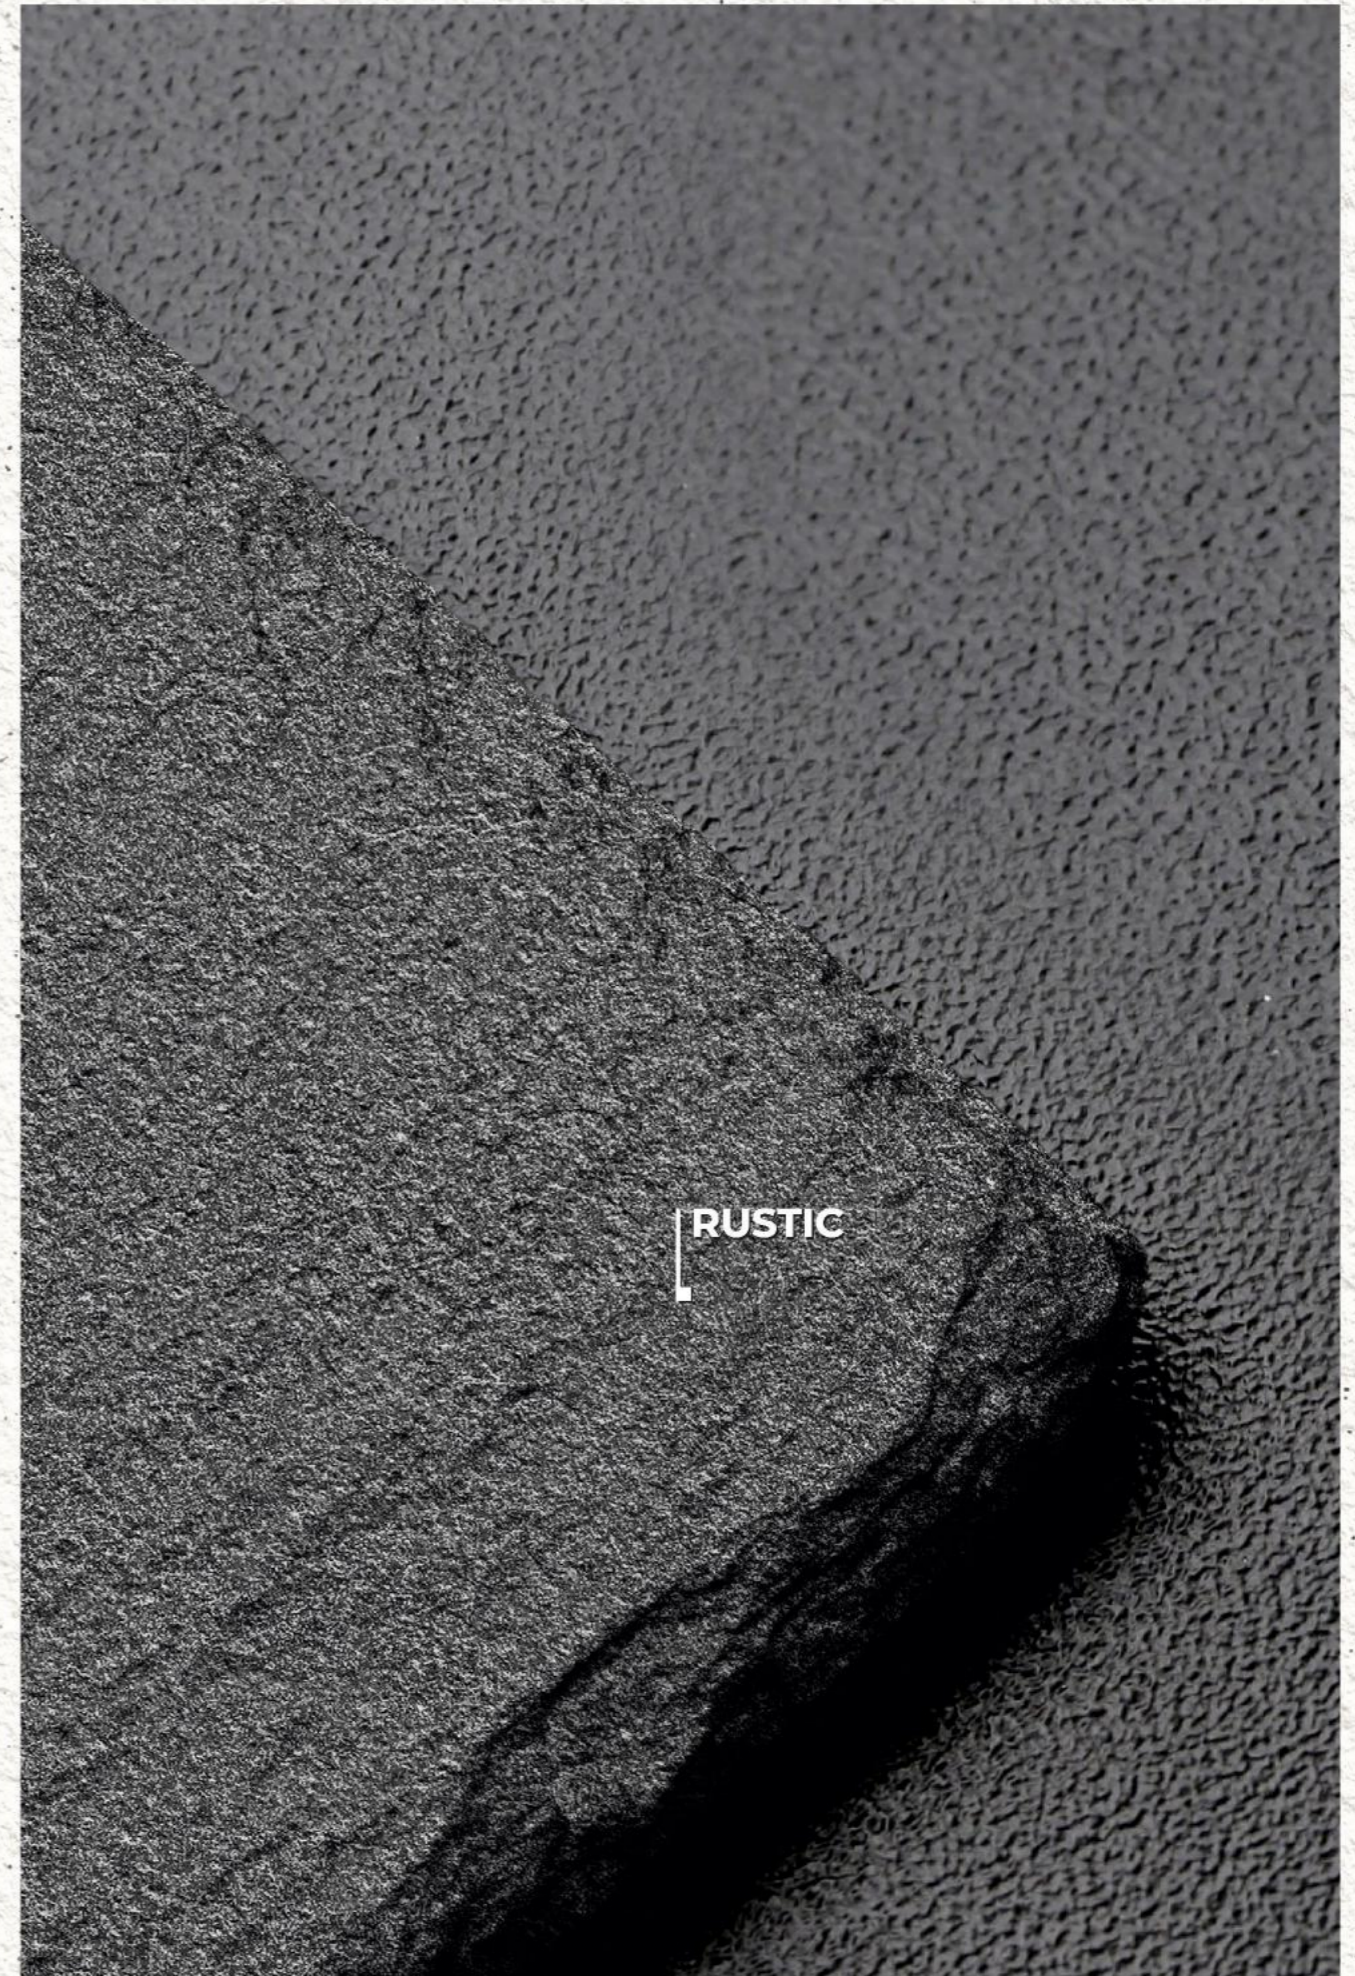




Rustic

ARTSTONE BEIGE



FULL BODY
vitrified tiles



ARTSTONE BEIGE





Rustic

ARTSTONE BLACK



FULL BODY
vitrified tiles



ARTSTONE BLACK







Rustic

ARTSTONE BROWN




FULL BODY
vitrified tiles

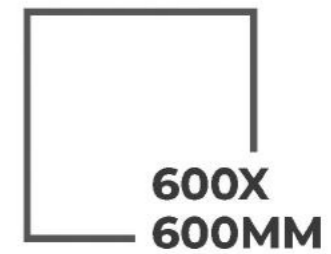

16 MM
THICKNESS

ARTSTONE BROWN



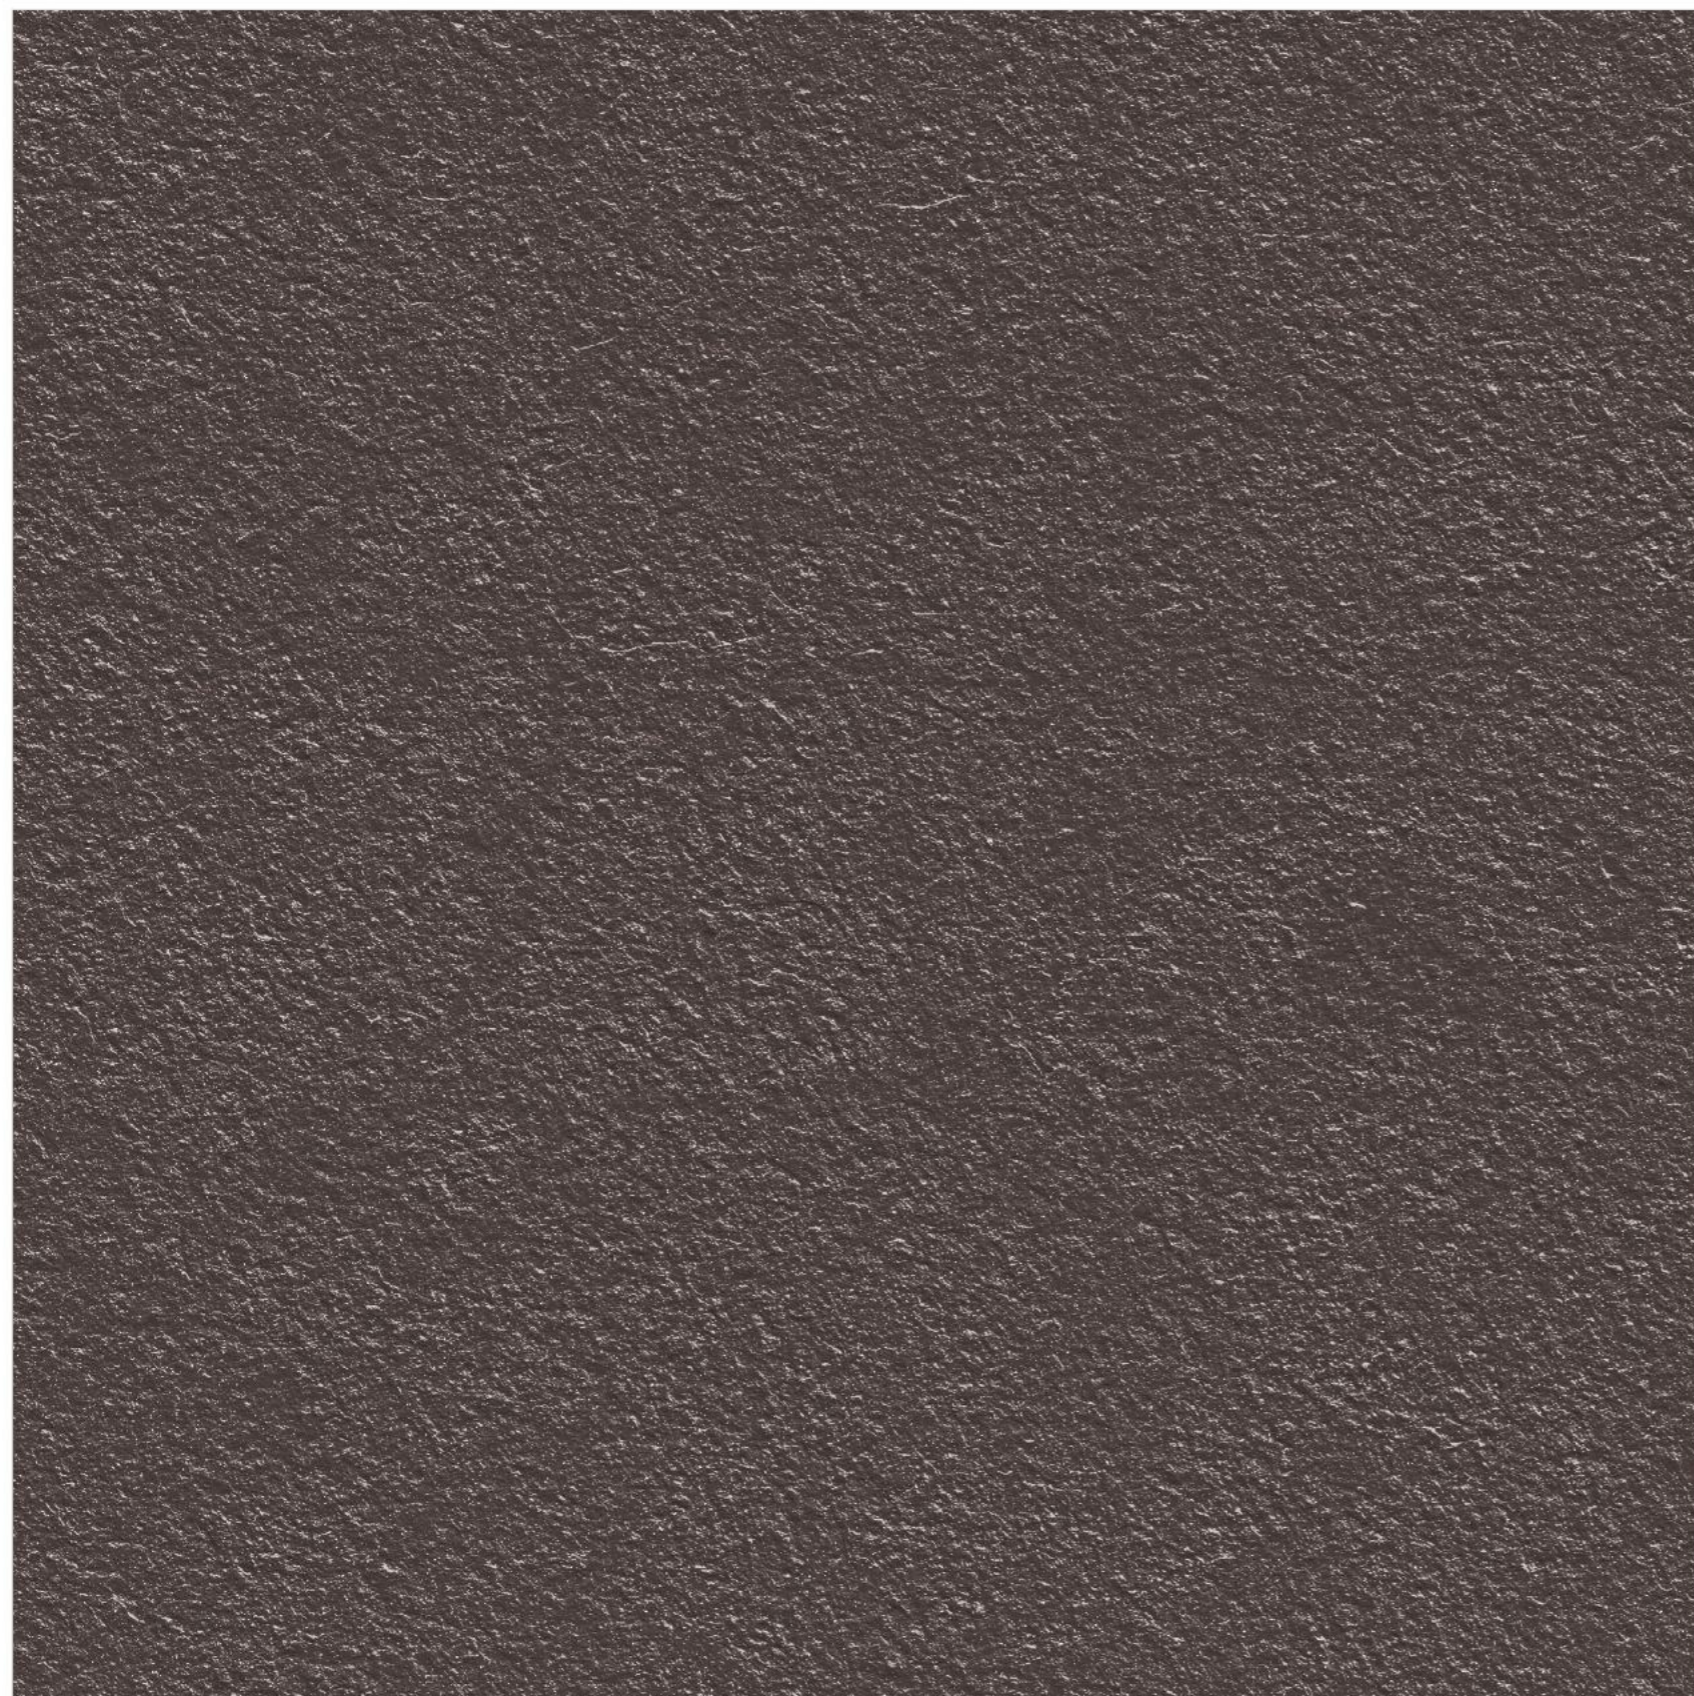

Rustic

ARTSTONE CHOCO




FULL BODY
vitrified tiles



ARTSTONE CHOCO




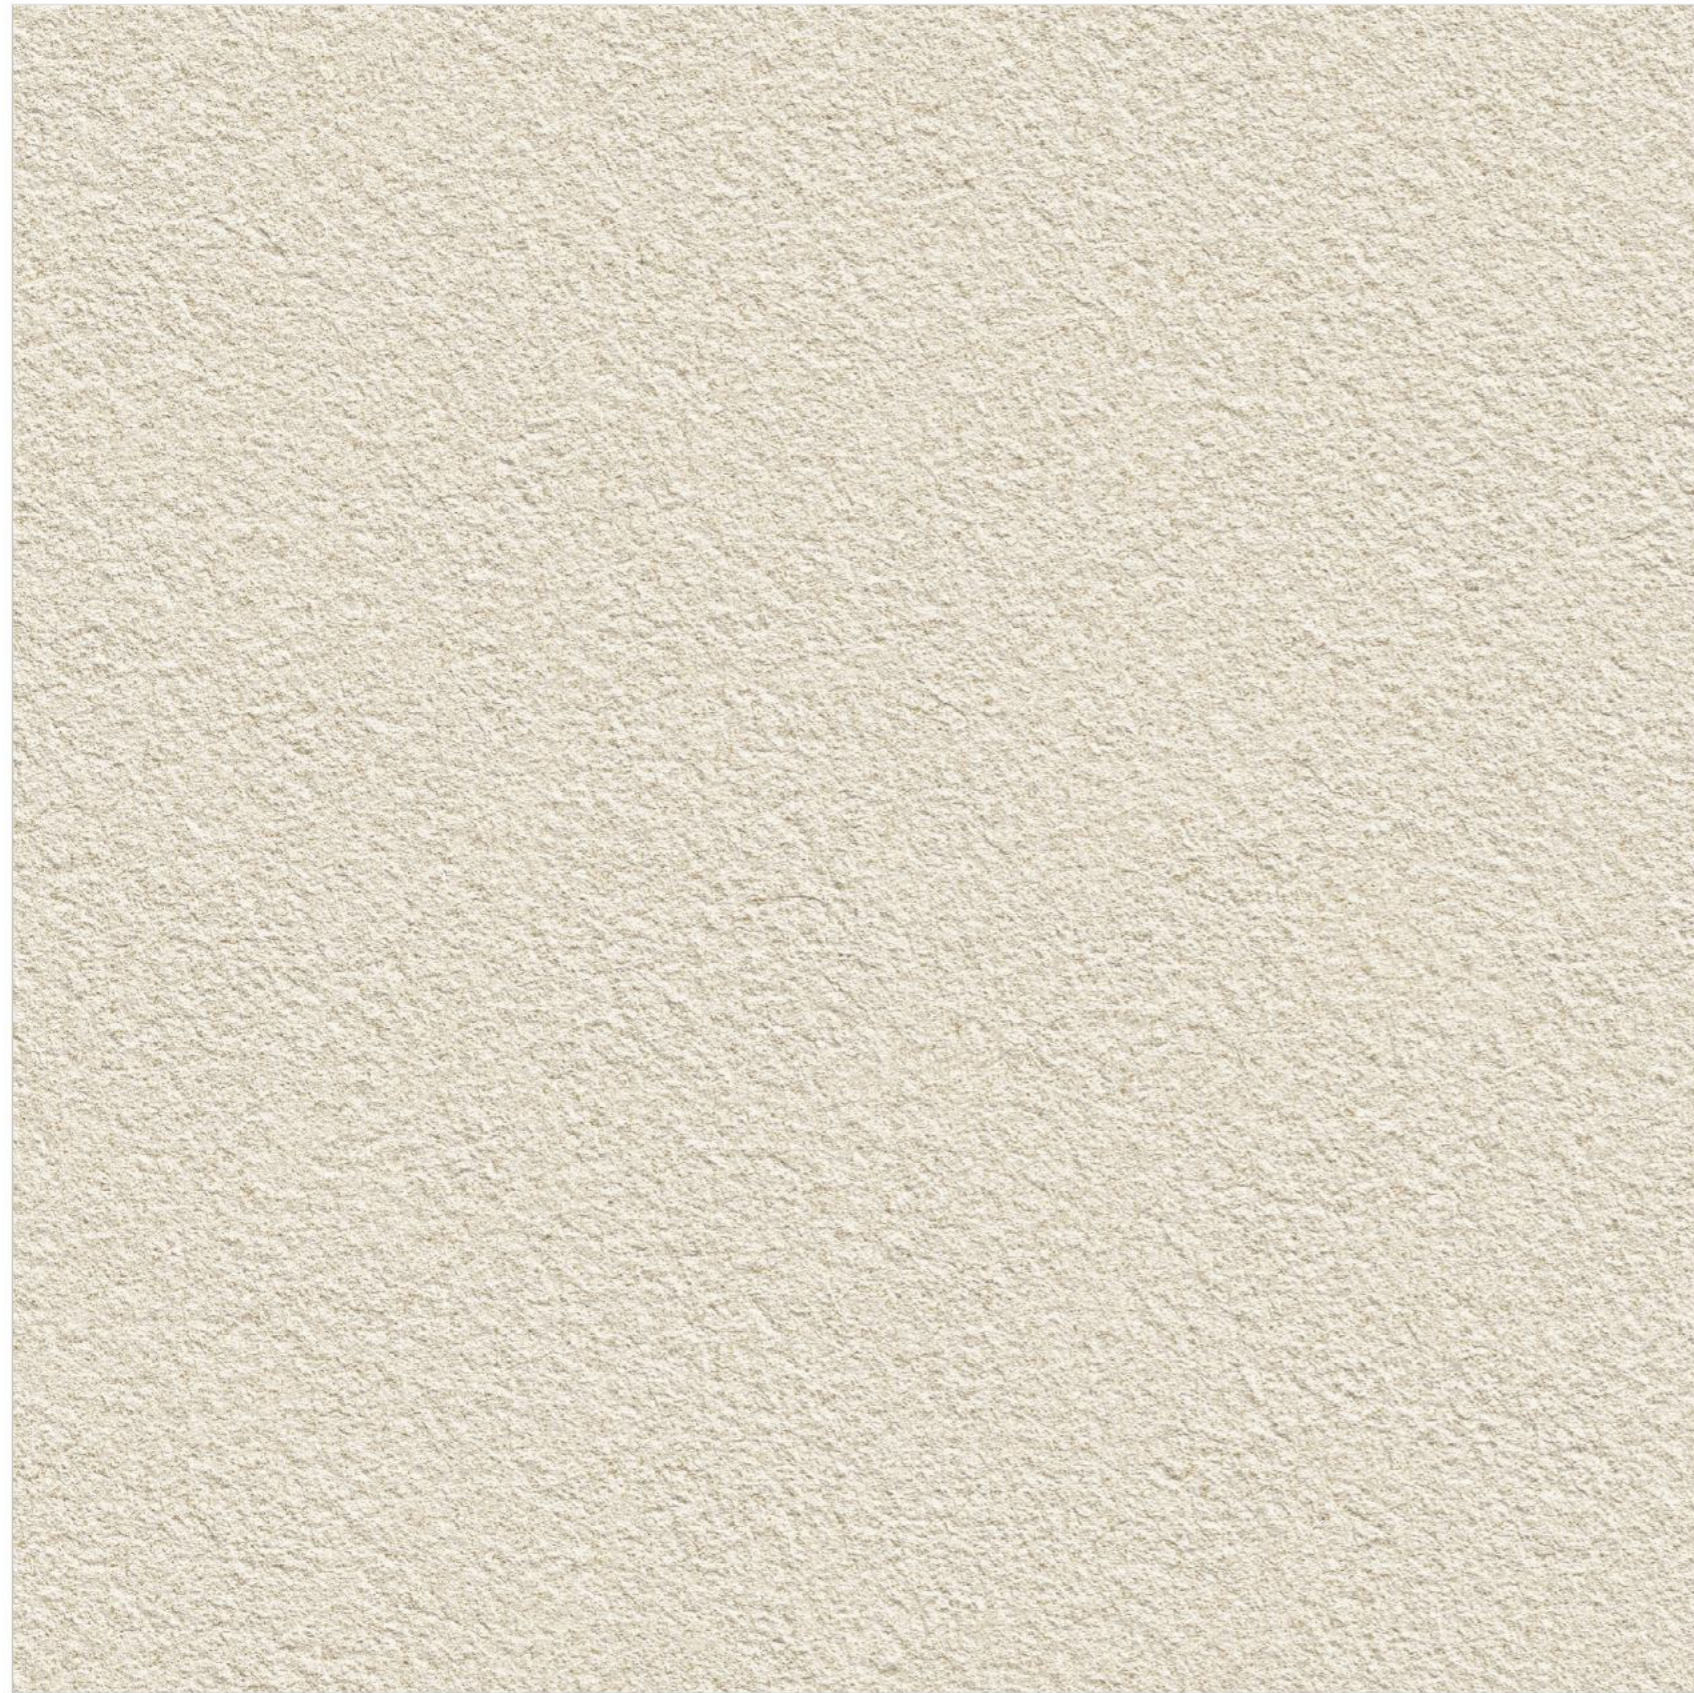


Rustic

ARTSTONE CREAM



FULL BODY
vitrified tiles



16 MM
THICKNESS

ARTSTONE CREAM







Rustic

ARTSTONE IVORY




FULL BODY
vitrified tiles



16 MM
THICKNESS

ARTSTONE IVORY



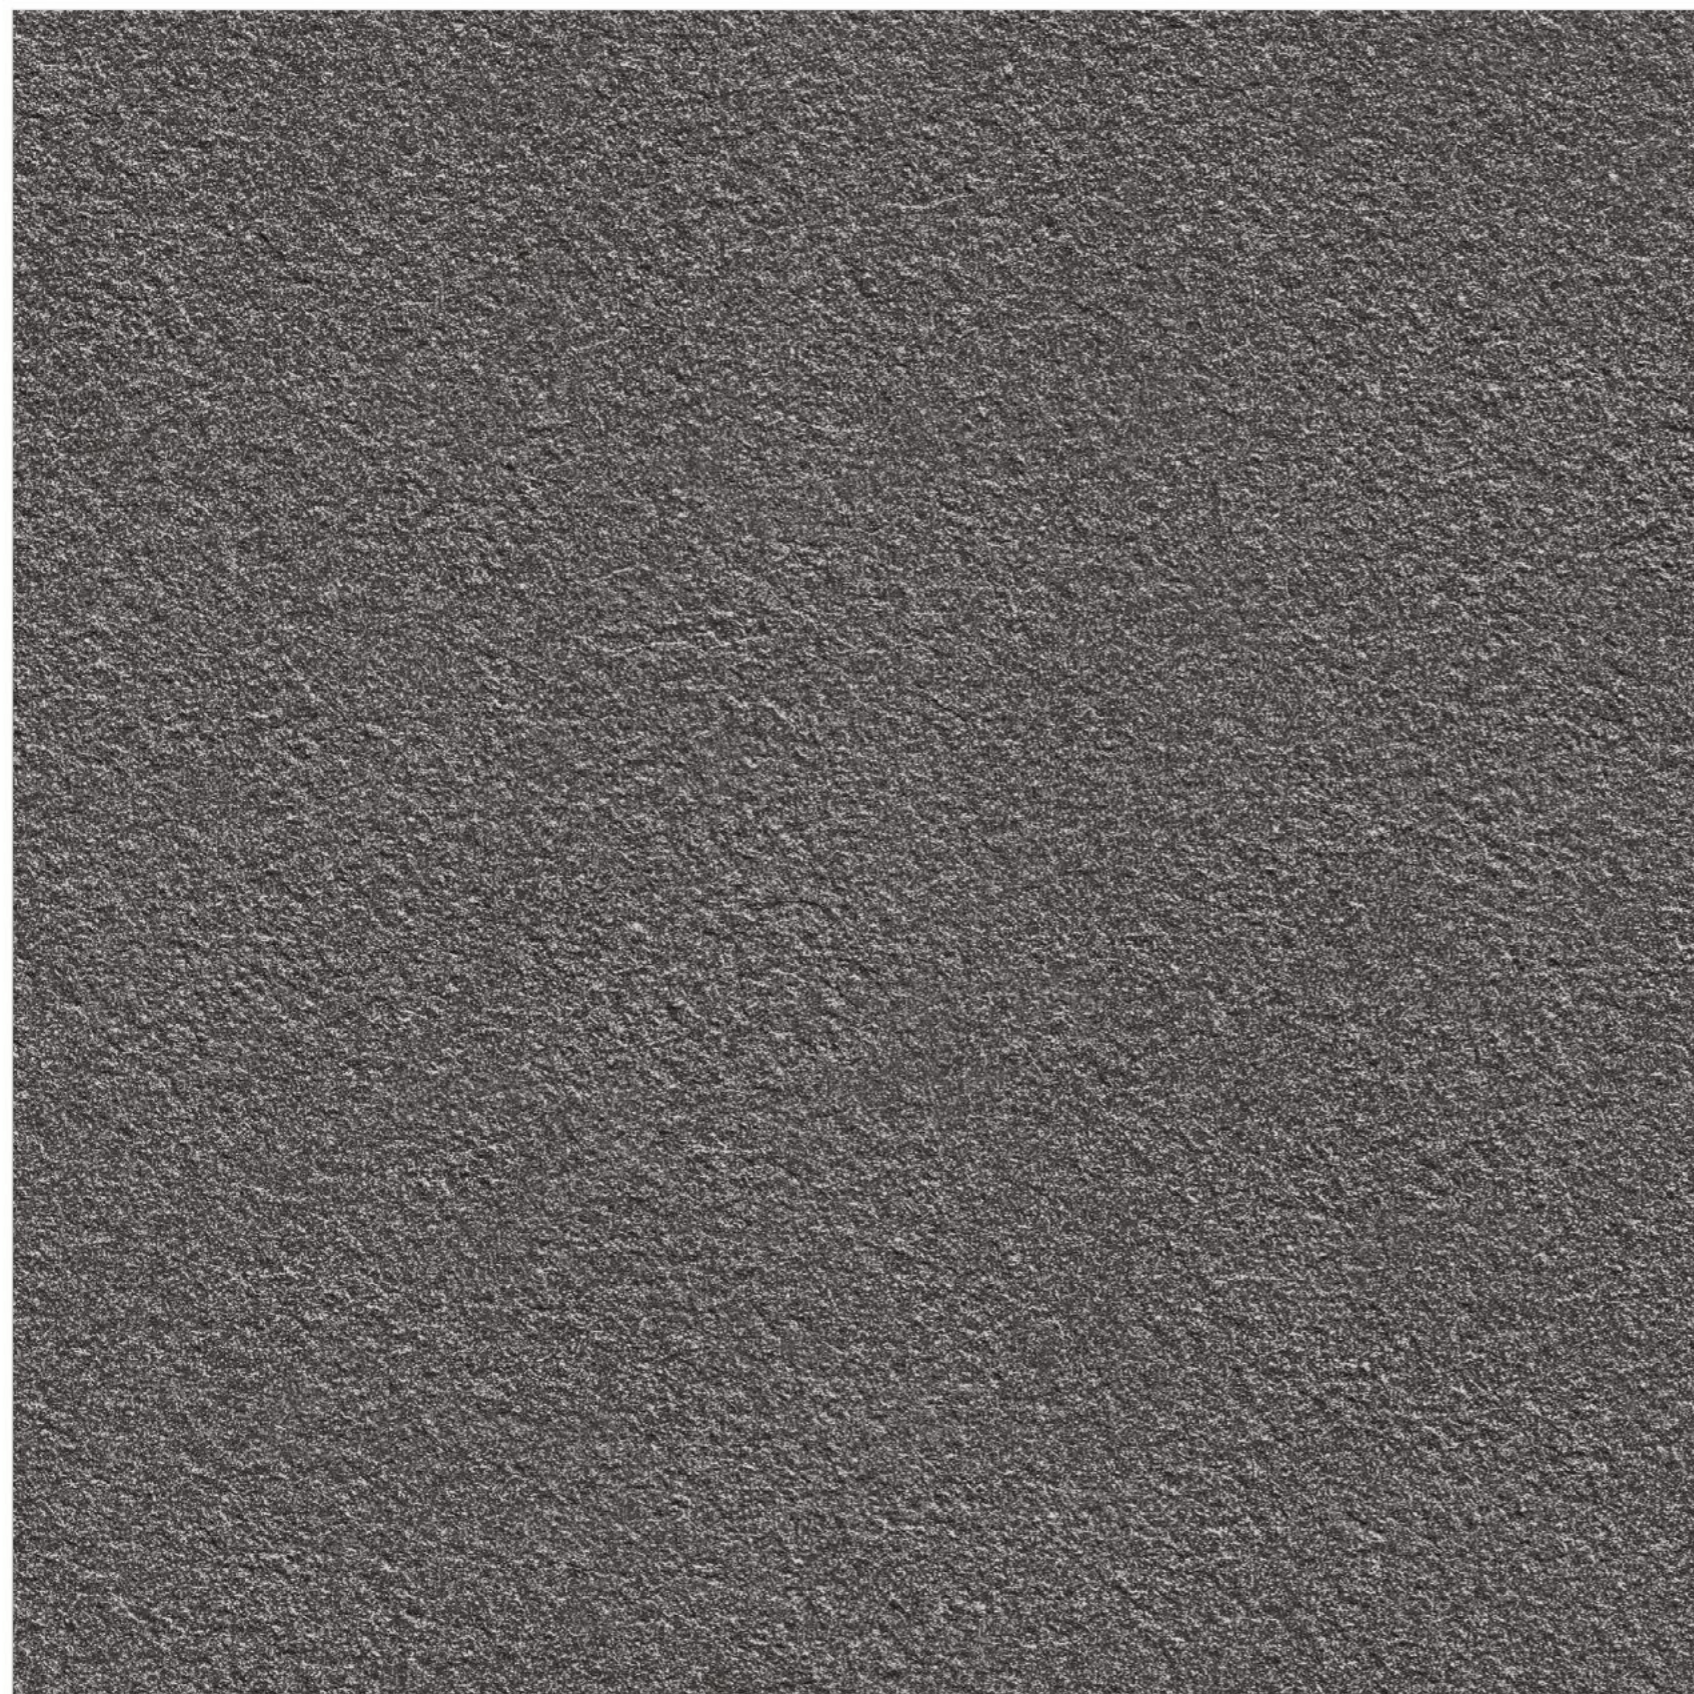


Rustic

ARTSTONE NERO



FULL BODY
vitrified tiles



16 MM
THICKNESS

ARTSTONE NERO






Rustic


ARTSTONE OLIVE




FULL BODY
vitrified tiles



16 MM
THICKNESS

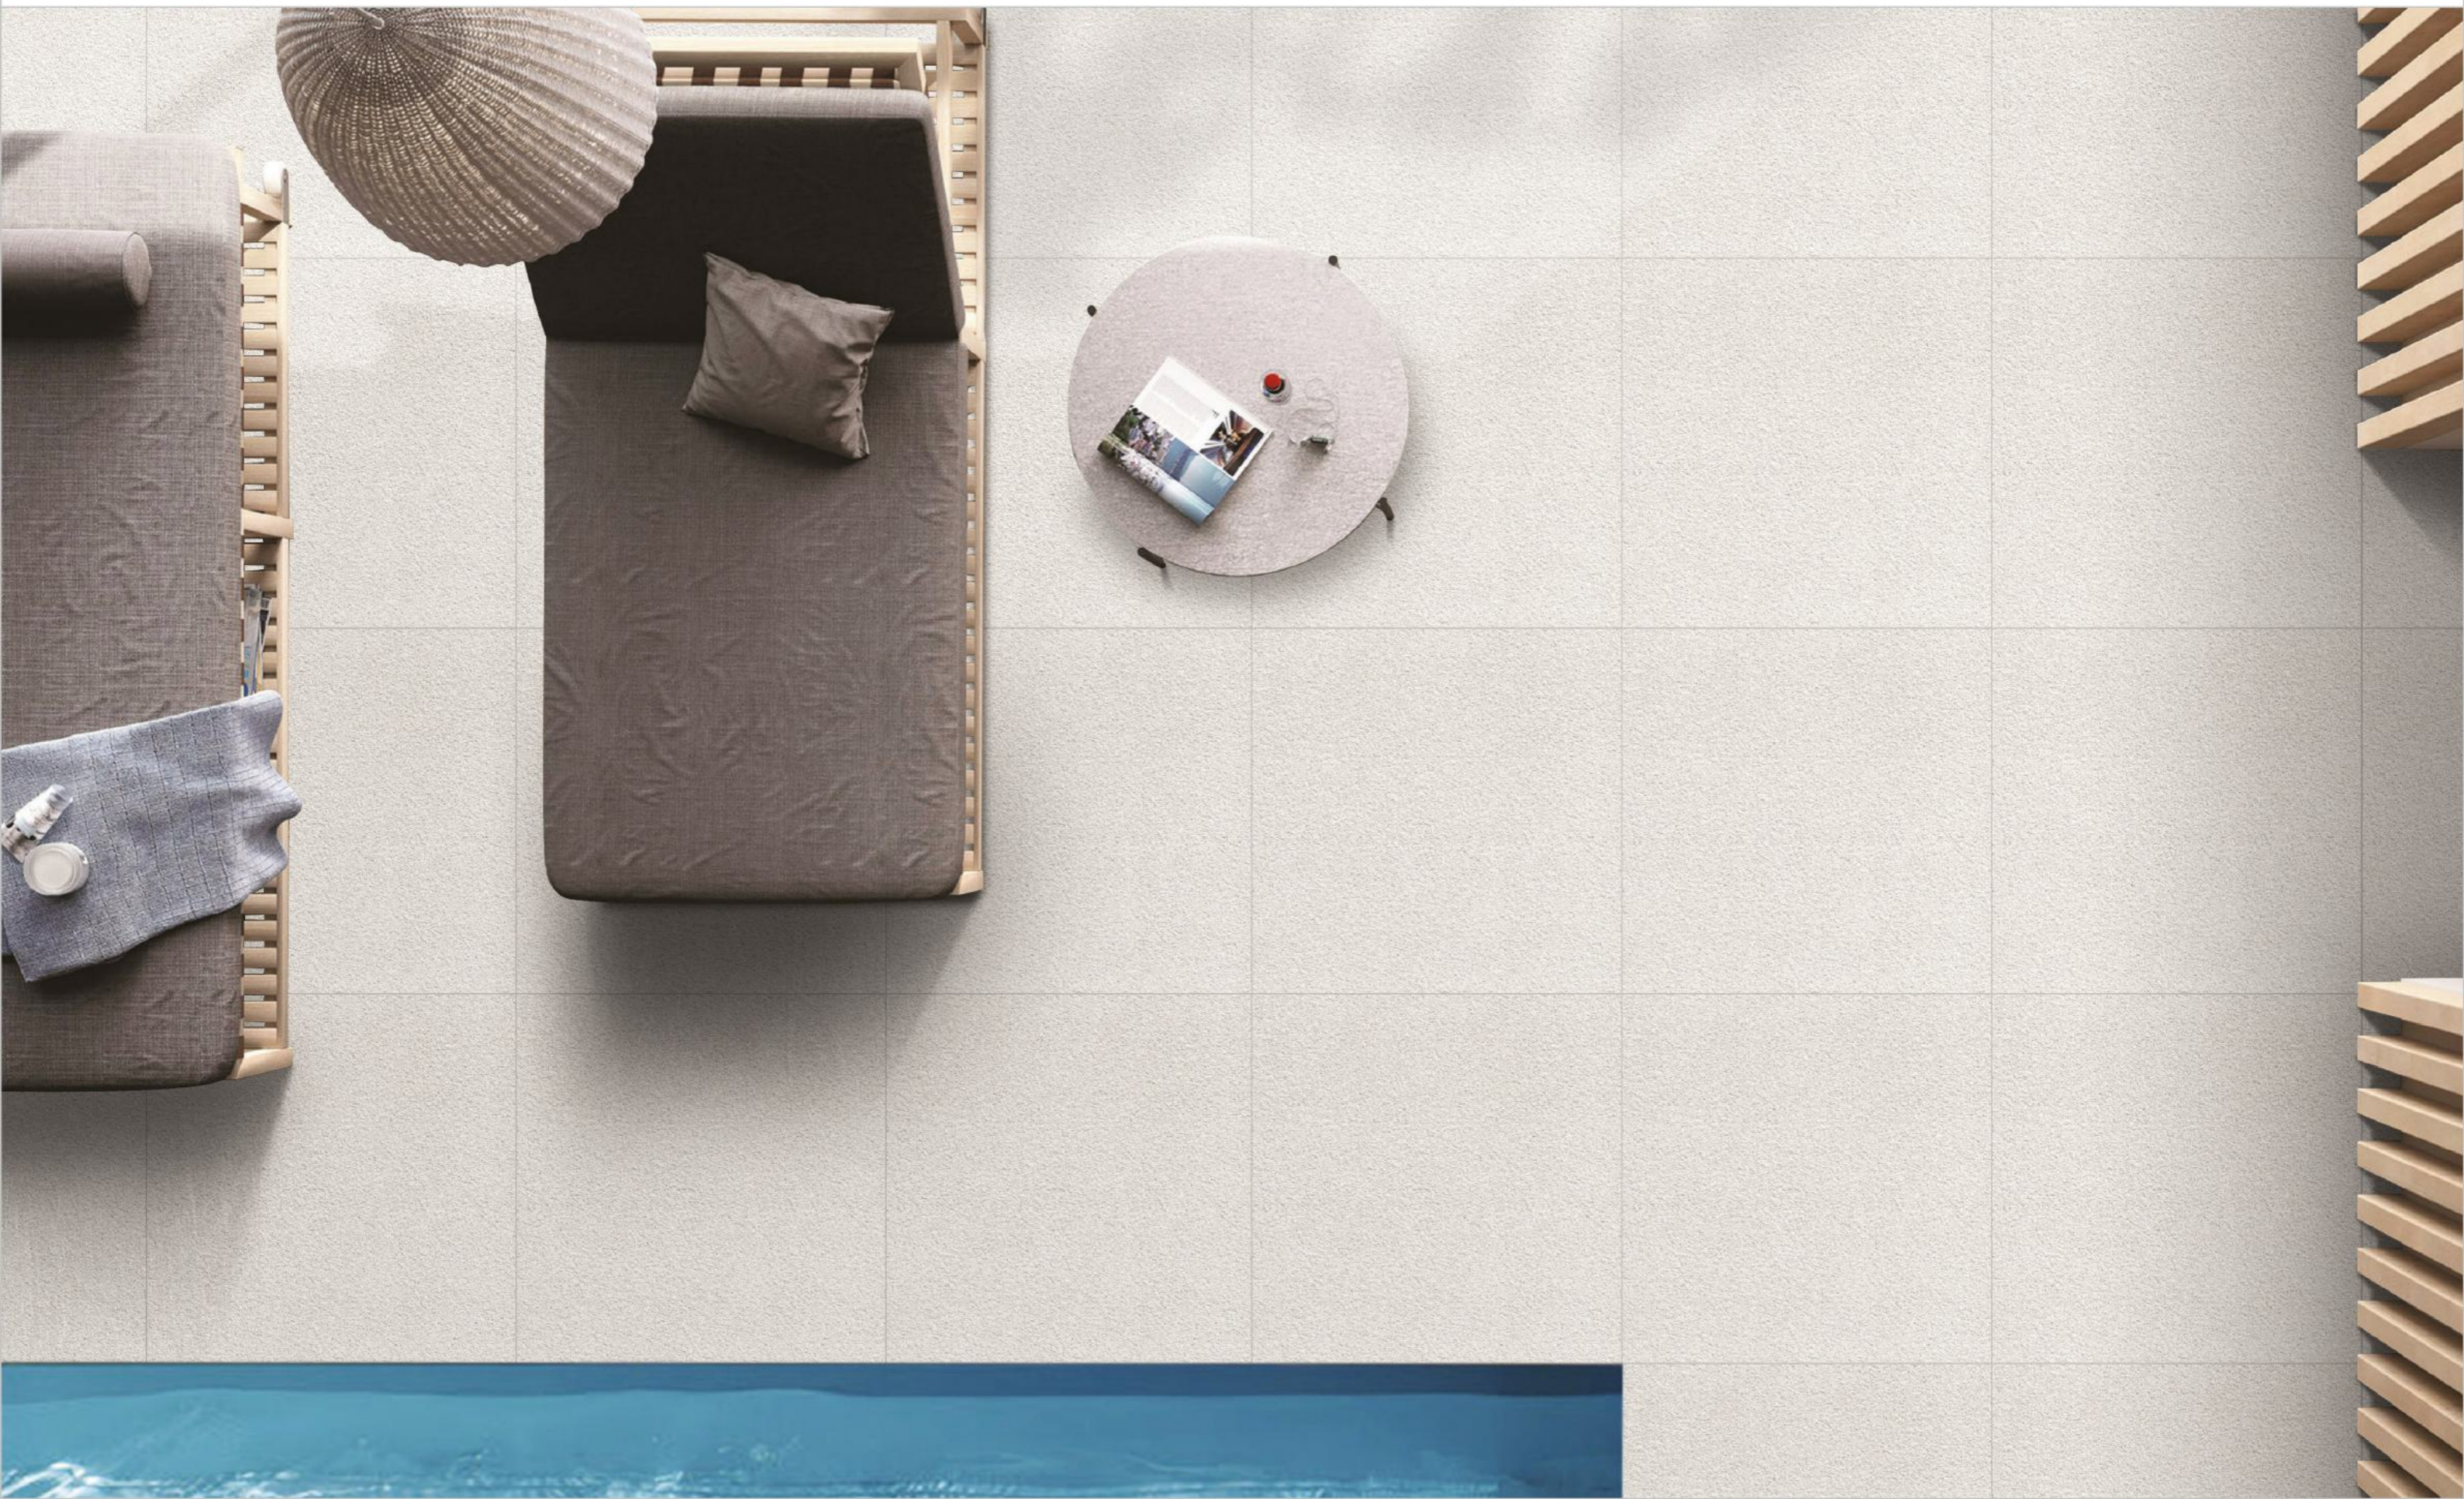


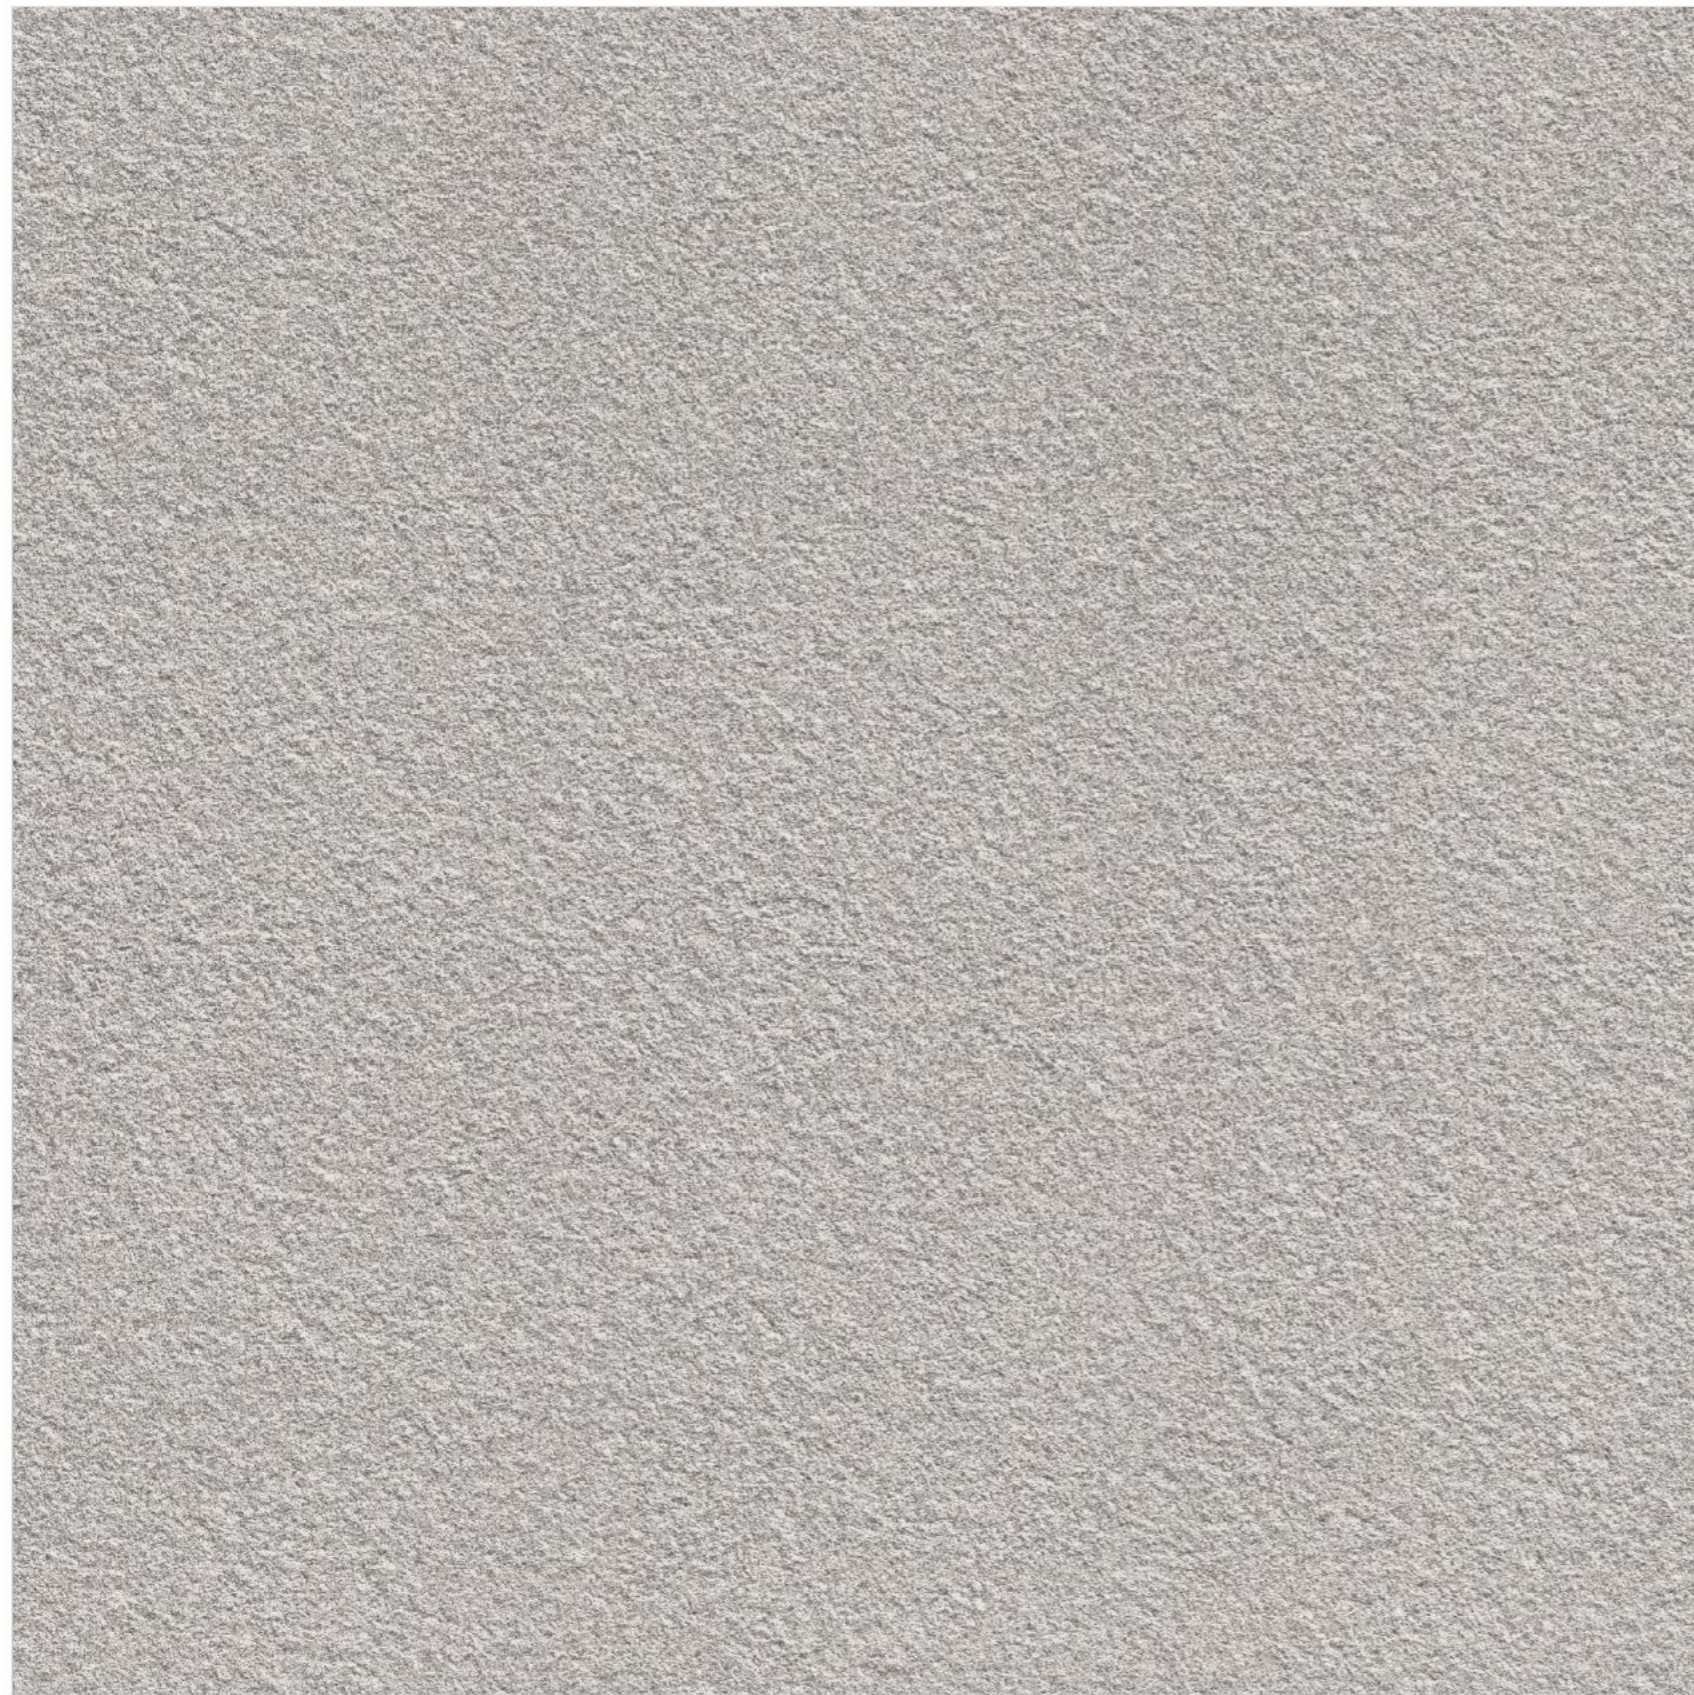


Rustic

ARTSTONE PEARL



FULL BODY
vitrified tiles



16 MM
THICKNESS

ARTSTONE PEARL






Rustic

ARTSTONE GREY



FULL BODY
vitrified tiles






Rustic

ARTSTONE VERDE



FULL BODY
vitrified tiles



16 MM
THICKNESS





Matt

ARTSTONE KOTA




FULL BODY
vitrified tiles



16 MM
THICKNESS

ARTSTONE KOTA



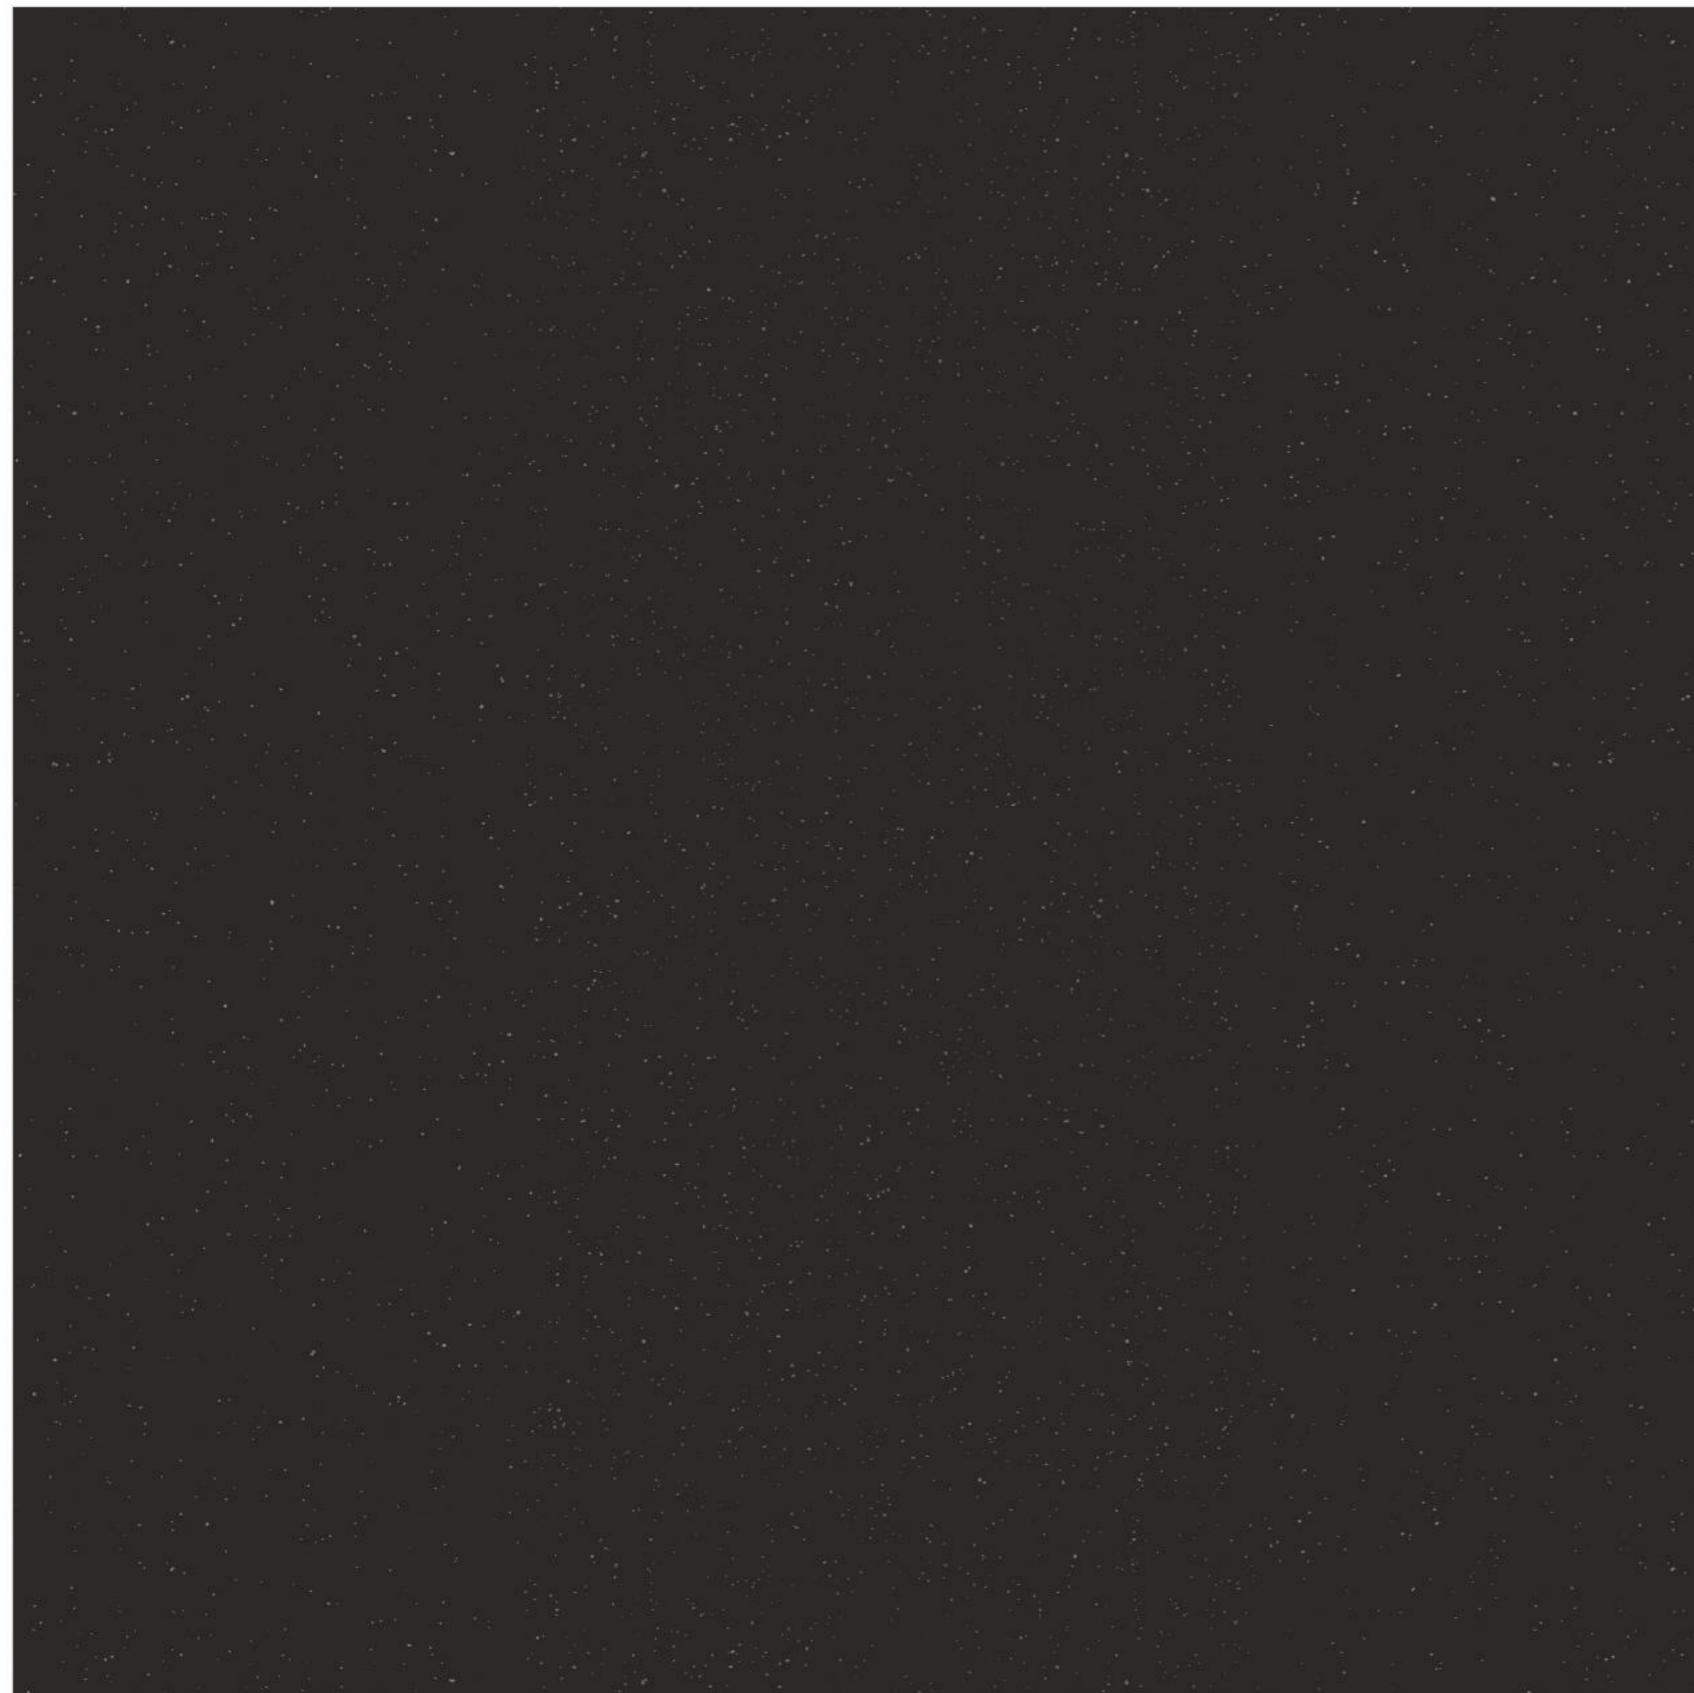


Matt

ROCK BLACK




FULL BODY
vitrified tiles



ROCK BLACK



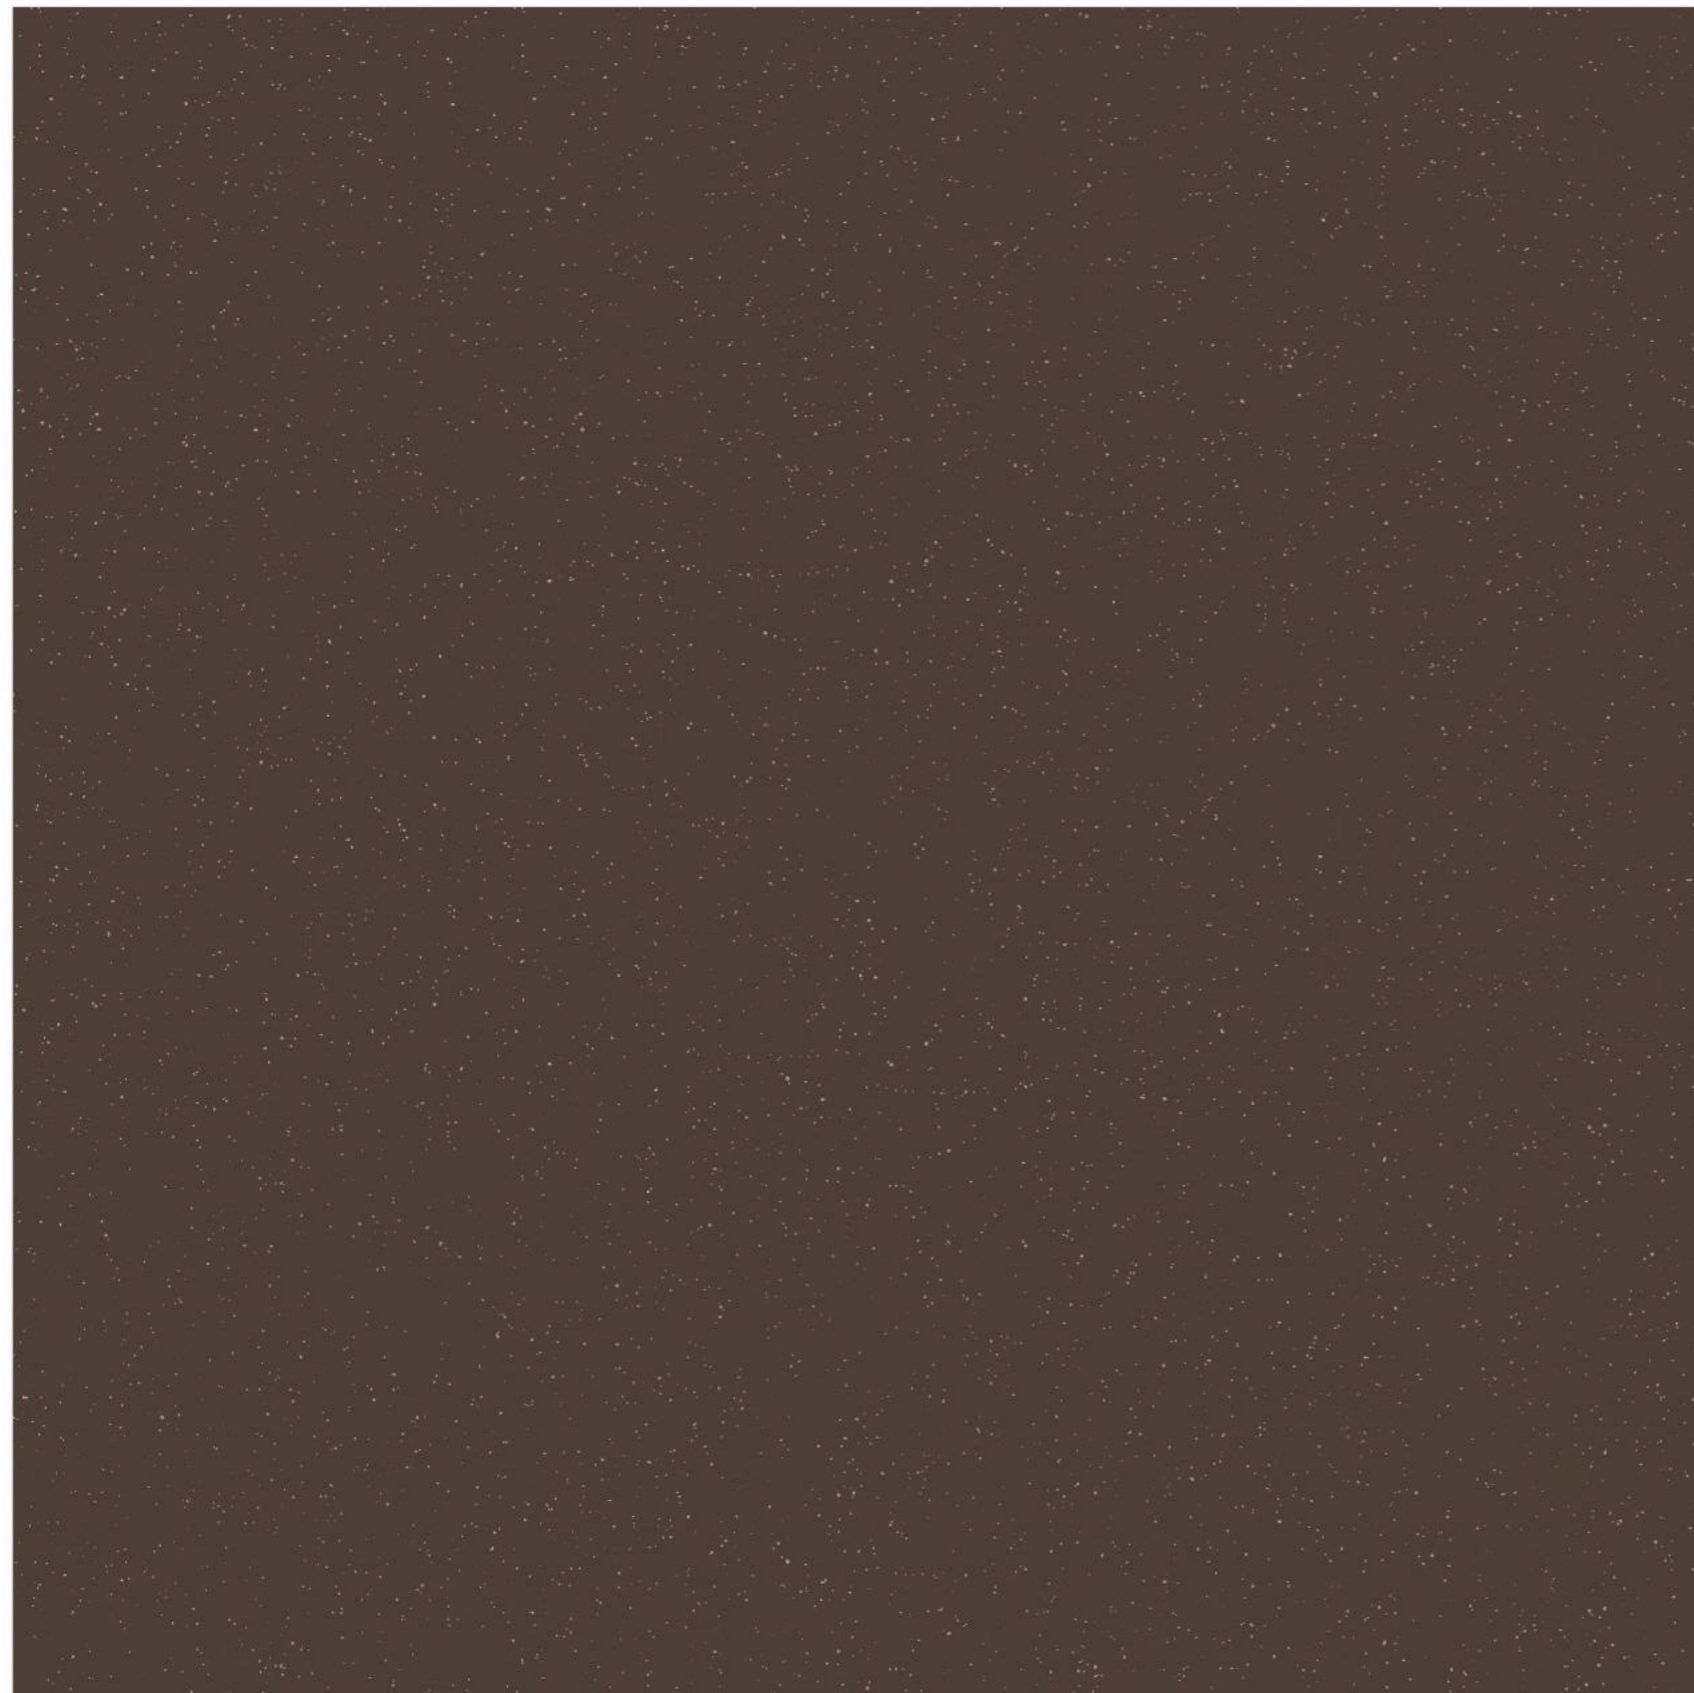


Matt

ROCK BROWN



FULL BODY
vitrified tiles



ROCK BROWN







Matt

ROCK CREAMA





FULL BODY
vitrified tiles



16 MM
THICKNESS

ROCK CREAMA

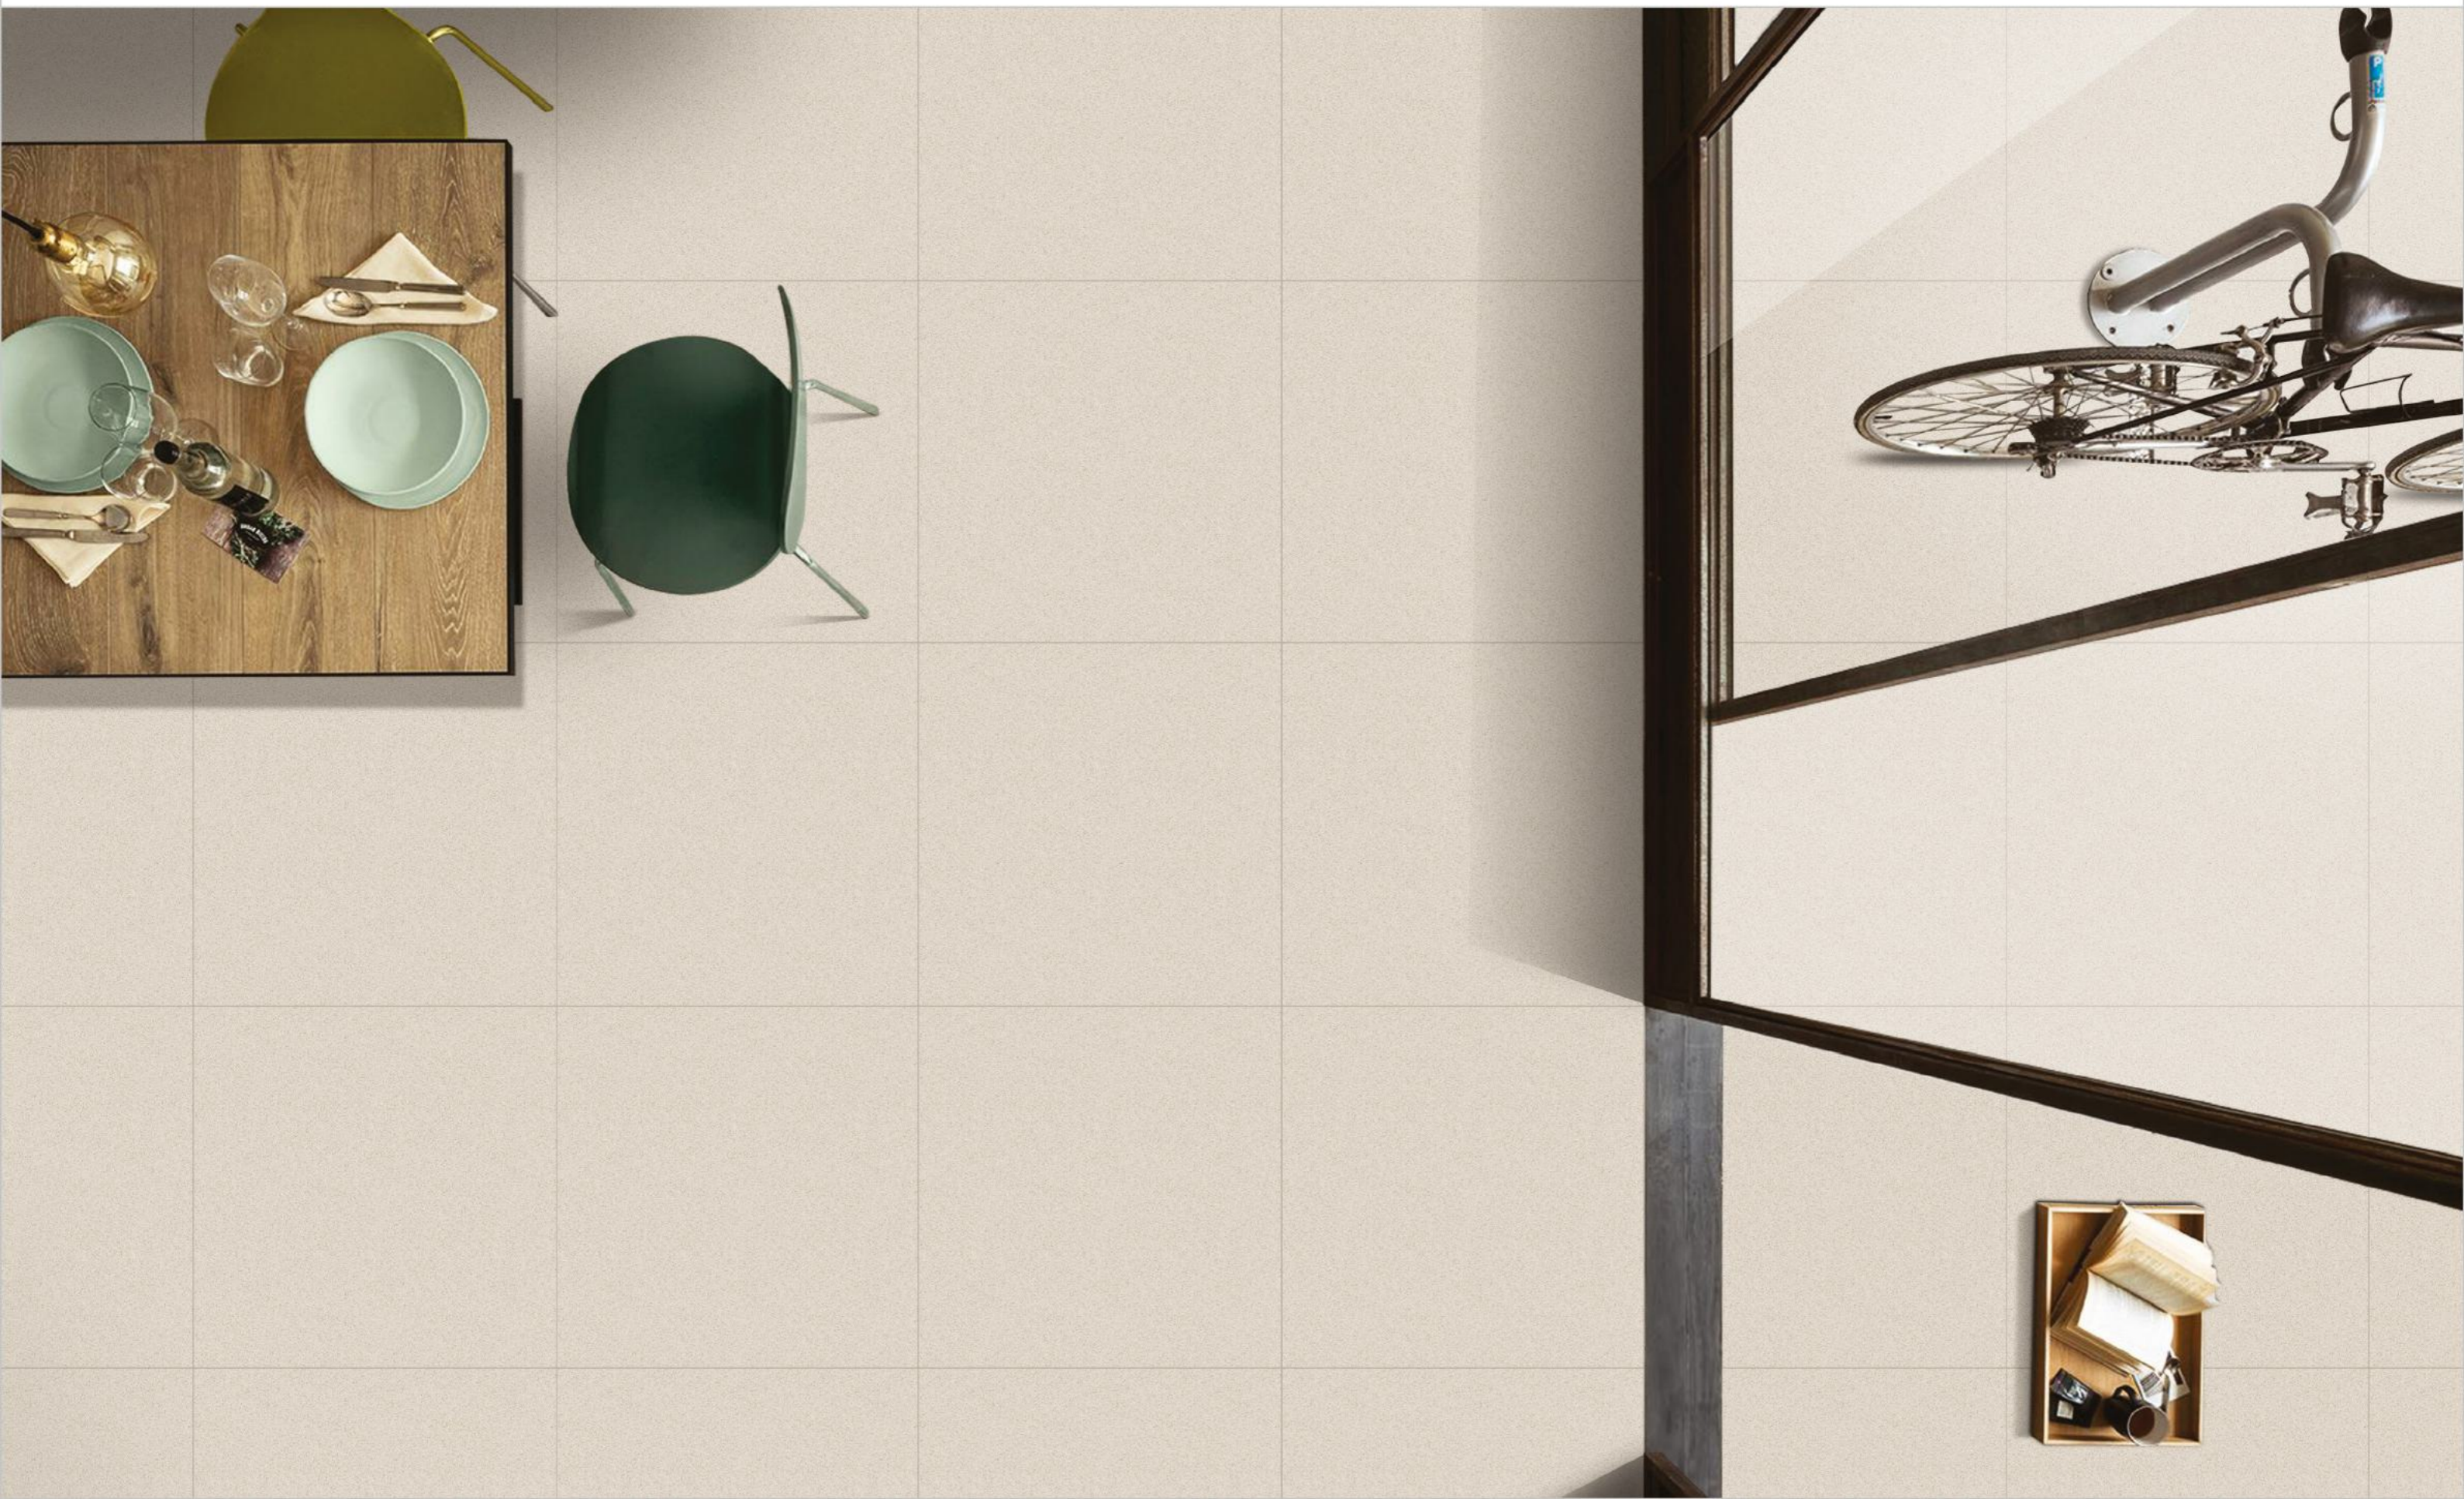


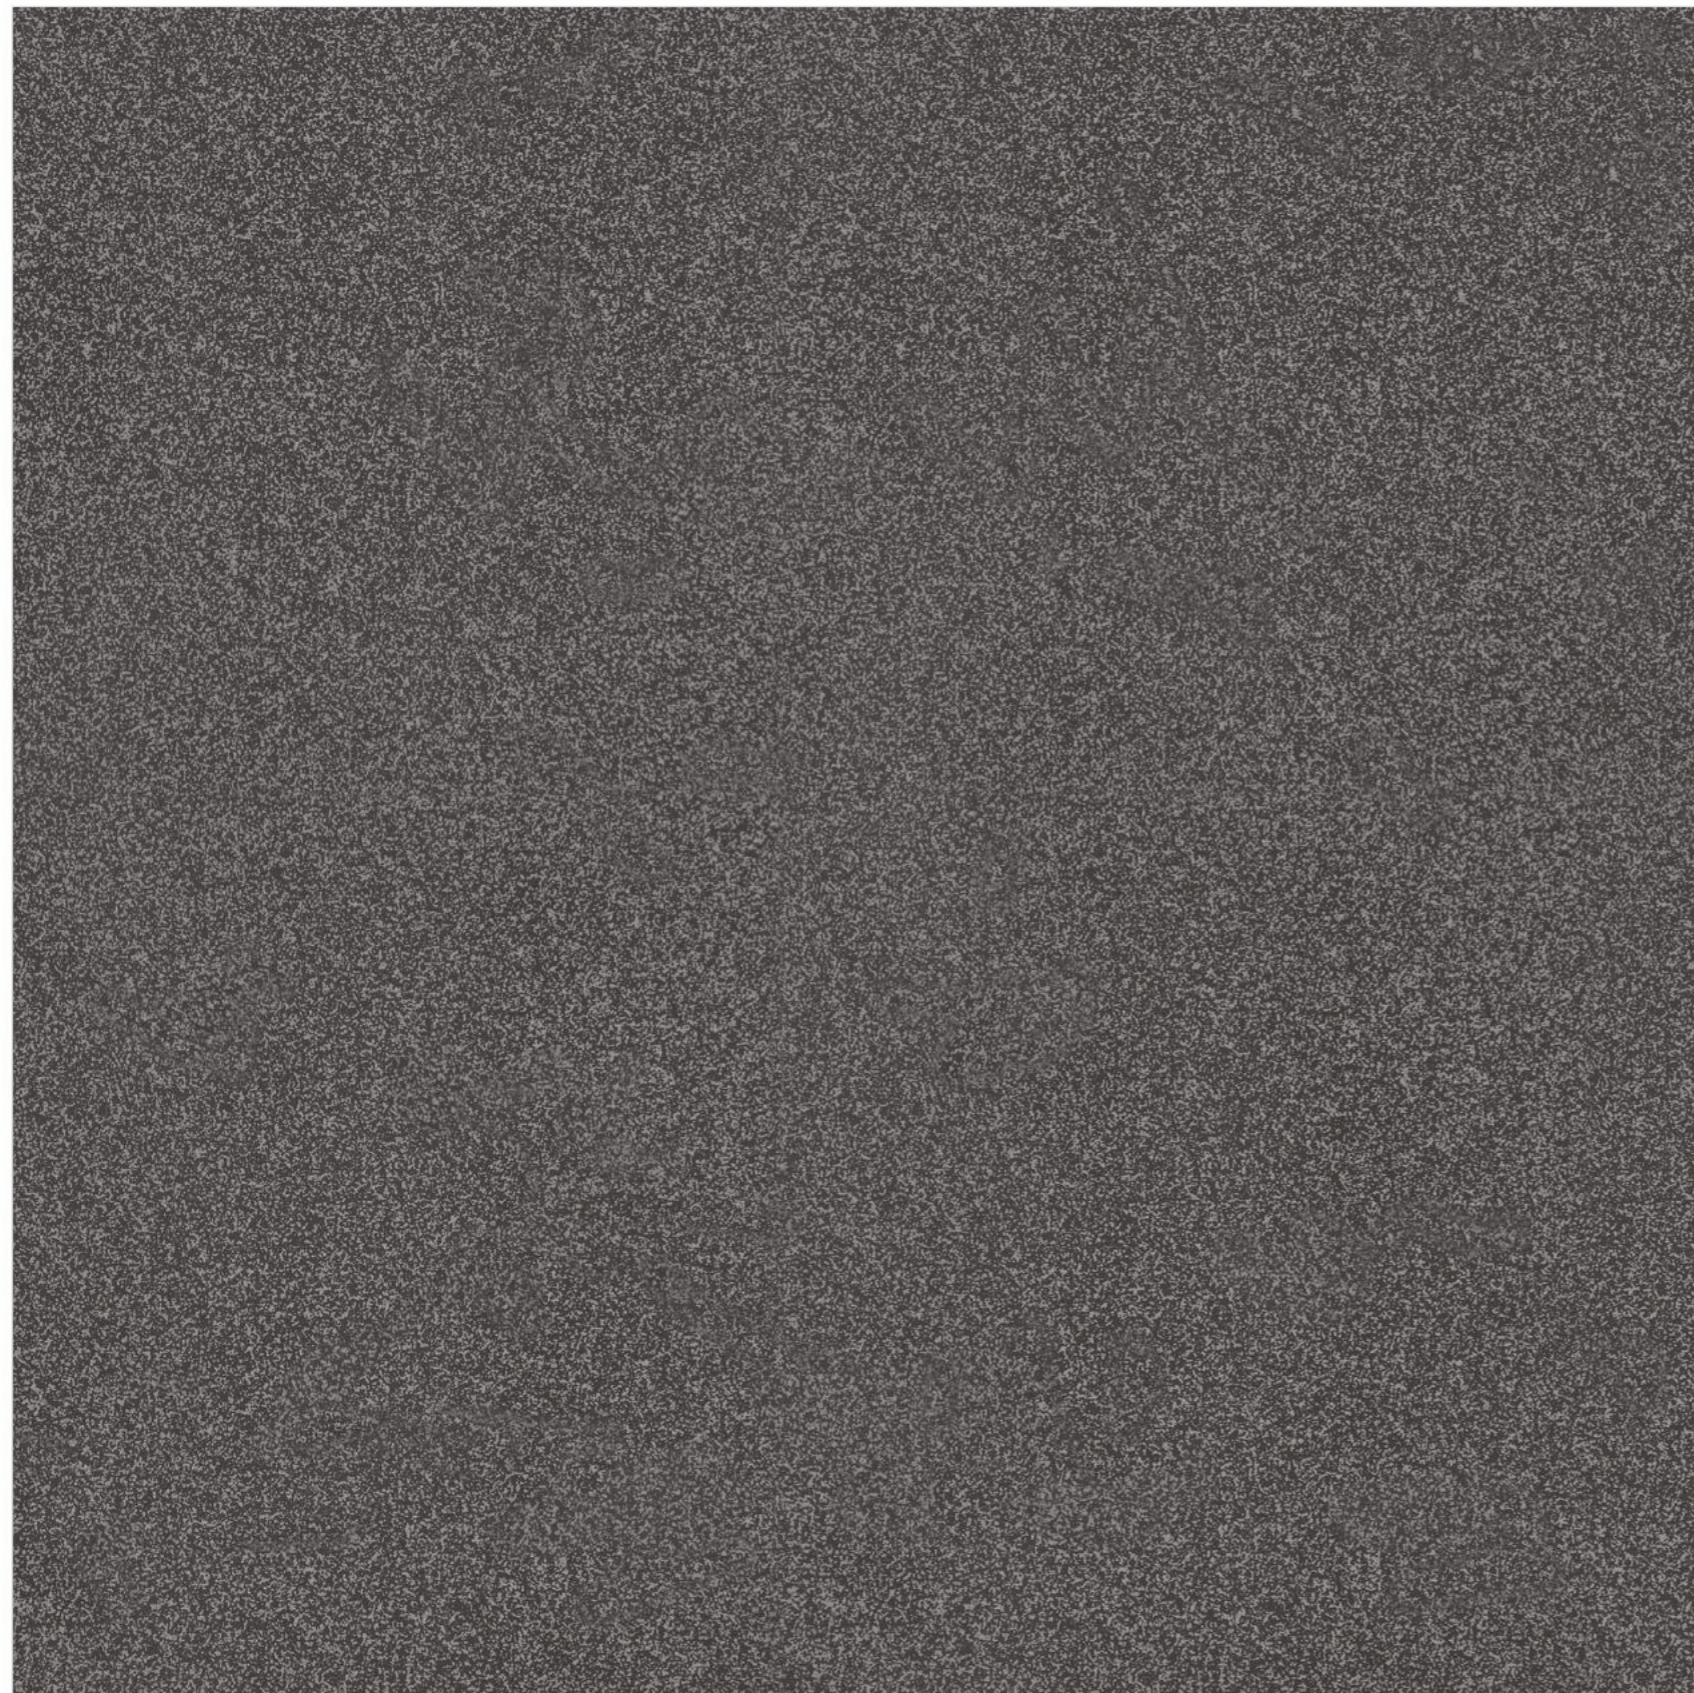


Matt

ROCK GREY




FULL BODY
vitrified tiles



16 MM
THICKNESS

ROCK GREY



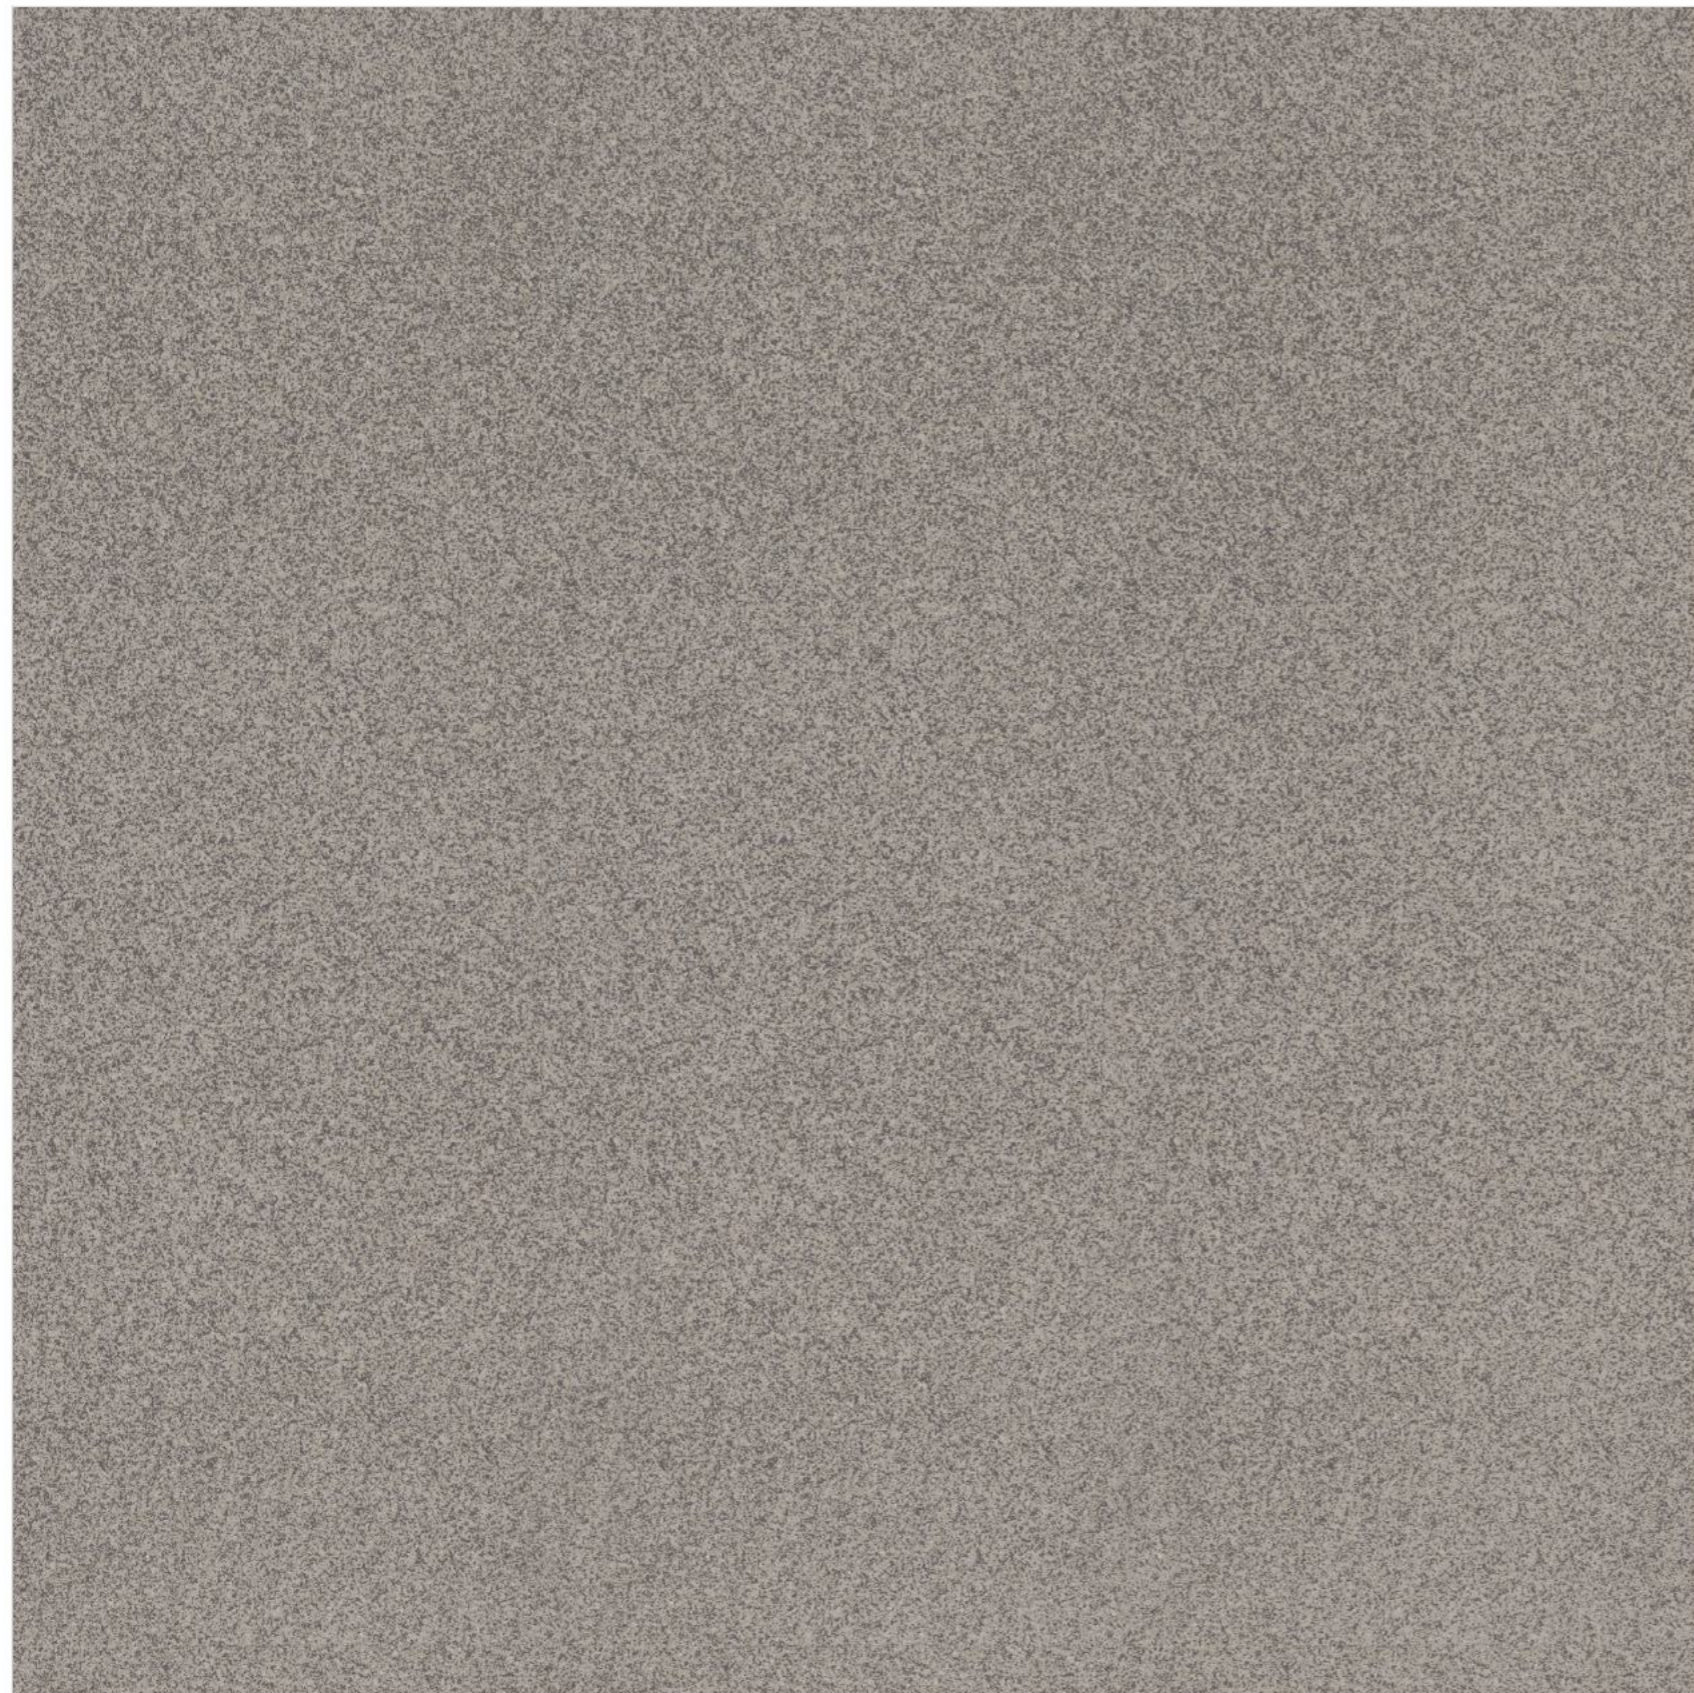


Matt


ROCK SILVER



FULL BODY
vitrified tiles



ROCK SILVER

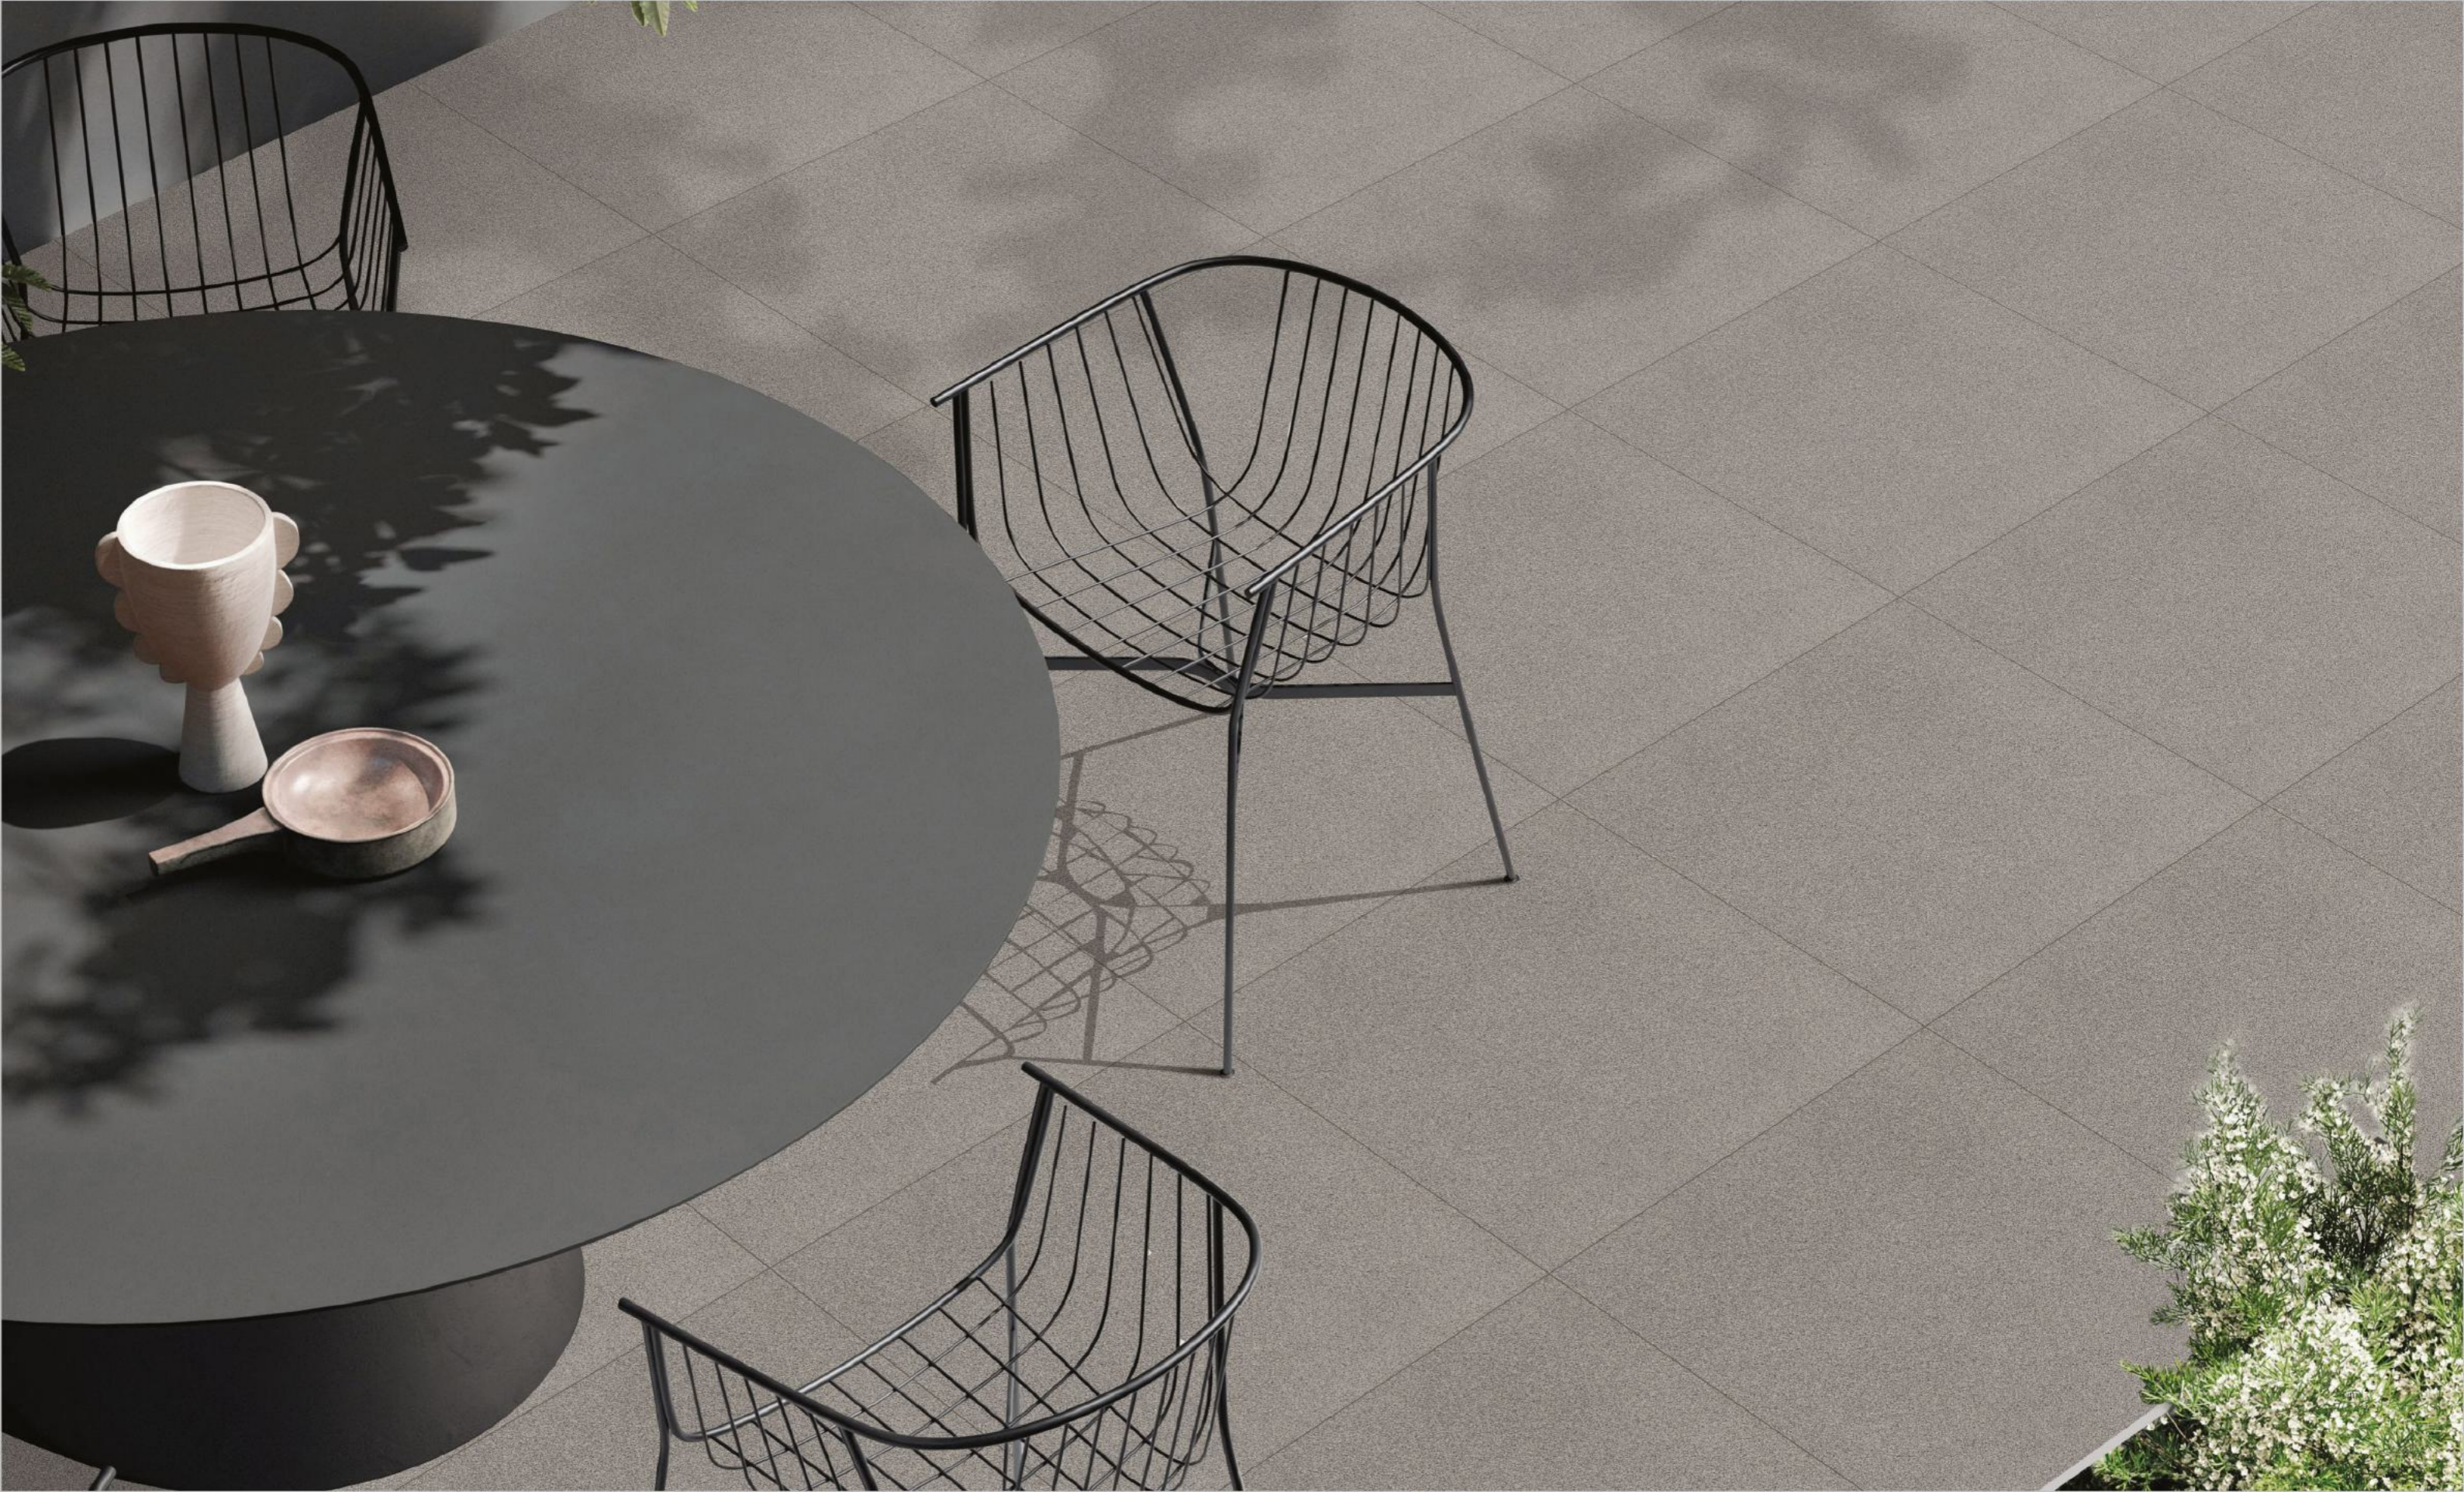





Matt

ROCK WHITE



FULL BODY
vitrified tiles



16 MM
THICKNESS

ROCK WHITE







Satin

ROYAL KOTA



FULL BODY
vitrified tiles



16 MM
THICKNESS







Satin

ROYAL IRIS



FULL BODY
vitrified tiles



16 MM
THICKNESS




Satin


ROYAL STEEL GREY



FULL BODY
vitrified tiles



**600X
600MM**



**16 MM
THICKNESS**

TECHNICAL SPECIFICATION

Sr. No.	CHARACTERISTICS	STANDARD AS PER ISO-13006 / EN14411 GROUP BIA	OUR VALUE	TEST METHOD
REGULATORY PROPERTIES				
01	Deviation in length & width	± 0.50%	± 0.20%	ISO-10545-2
02	Deviation in thickness	± 5.00%	± 4.00%	ISO-10545-2
03	Straightness of sides	± 0.50%	± 0.10%	ISO-10545-2
04	Rectangularity	± 0.50%	± 0.20%	ISO-10545-2
05	Surface flatness	± 0.50%	± 0.20%	ISO-10545-2
06	Colour difference	Unaltered	No Change	ISO-10545-16
STRUCTURAL PROPERTIES				
01	Water Absorption	< 0.50%	< 0.50 %	ISO-10545-3
02	Apparent density	> 2.00 g/cc	> 2.28 g/cc	DIN 51082
MASSIVE MECHANICAL PROPERTIES				
01	Modulus or rupture	Min. 35 N/mm ²	Min. 45 N/mm ²	ISO-10545-4
02	Breaking strength	Min. 1300 N	Min. 2000 N	ISO-10545-4
03	Impact resistance	As per mfg.	Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PROPERTIES				
01	Deep abrasion resistance	Max. 175mm ³	Max. 132mm ³	ISO-10545-6
02	Moh's hardness	Min. 6	7	EN 101
03	Surface Abrasion Resistance	As per mfg.	N. A.	ISO-10545-7

THERMOHYDROMETRIC PROPERTIES

01	Frost resistance	No Damage	Frost proof	ISO-10545-12
02	Thermal shock resistance	No Damage	No Damage	ISO-10545-9
03	Moisture expansion	Nil	Nil	ISO-10545-10
04	Thermal Expansion(COE)	Max. 9.0×10^{-6}	Max. 6.5×10^{-6}	ISO-10545-8
04	Crazing Resistance	As Per Mfg.	N.A.	ISO-10545-11

CHEMICAL PROPERTIES

01	Chemical resistance	No Damage	No Damage	ISO-10545-13
02	Satin resistance	Resistance	Resistance	ISO-10545-14

SAFETY PROPERTIES

01	Slip resistance (friction co efficient)	> 0.40	> 0.40	ISO-10545-17
----	---	--------	--------	--------------

**PACKING
DETAILS**

SIZE	PCS./BOX	WEIGHT / BOX			AREA / BOX
		POLISHED	SATIN	RUSTIC	
600x600mm	4 Pcs.	26.5 Kg.	28.5 Kg.	28.5 Kg.	1.44 Sq. Mtr.
600x900mm	2 Pcs.	-	24.5 Kg.	-	1.08 Sq. Mtr.
600x1200mm	2 Pcs.	28.5 Kg.	30 Kg.	30 Kg.	1.44 Sq. Mtr.
600x600mm (16MM)	2 Pcs.	-	25 Kg.	25 Kg.	0.72 Sq. Mtr.

Note : Certain amount of size and shade variation is inherent in all ceramic products. Our conformity to the above fast is applicable only for quality. Colour shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However the company reserve the right to change the specification without prior notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. It is suggest to check the tiles before purchase any laying as the company does not accect responsibility once the tiles are laid.

